

NOISE CONTROL DIRECTORY



PROMOTES CLEAN QUIET PNEUMATICS

allied witan company

About Us

Based in the Cleveland, Ohio, area for more than 60 years, the Allied Witan Company manufactures industrial noise control devices that promote clean, quiet, pneumatic technologies. Our complete line of air exhaust mufflers, all-metal mufflers and filters, porous metal filter silencers and breather-vent-filters help promote health and safety in the industrial workplace.



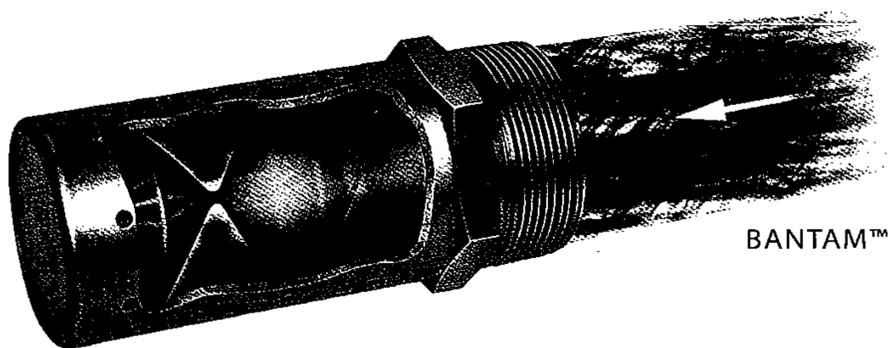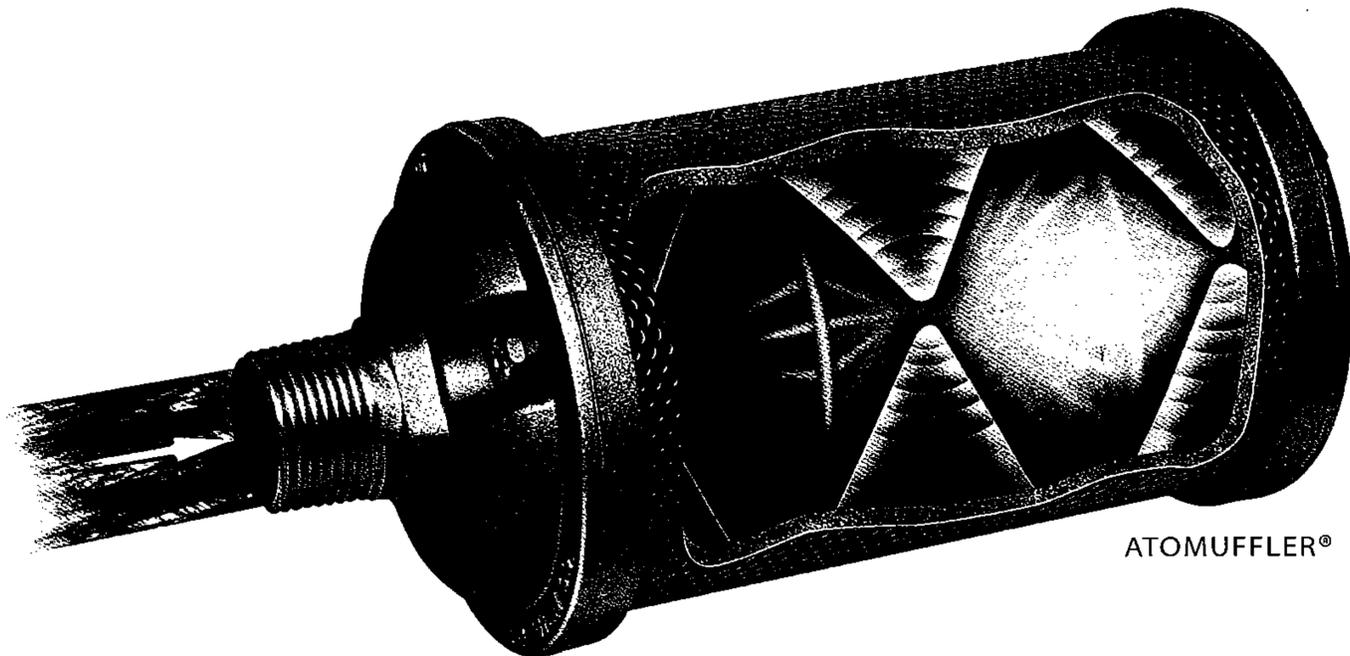

ATOMUFFLER® AND BANTAM™ DESIGNS FOR NOISE CONTROL BY THE ALLIED WITAN COMPANY

Stop Noise Before it Starts

The deafening roar of air exhaust isn't just distracting – it also can be dangerous. Eliminate the noise and help keep employees safe with the Atomuffler® and Bantam™ designs for noise control, offered exclusively by the Allied Witan Company.

How They Work

The Atomuffler and Bantam muffler and filter product lines eliminate excessive noise by dividing the air stream and turning it back on itself. As air exhaust enters the muffler at high velocity, the Atomuffler and Bantam mufflers redirect it into smaller air streams that rebound off opposing walls of the chamber. With the air streams colliding head-on with each other, the velocity is reduced and the air is dispersed throughout the disseminator surface area. This technique eliminates noise without sacrificing machine performance.

How They Help

For more than 60 years the Atomuffler has been used in thousands of plants and countless applications, and the Bantam muffler has proven itself time and again for more than 40 years. They both have an outstanding ability to eliminate excessive noise for a more pleasant working environment while reducing potential physical injuries caused by extreme air blasts.

Advantages

The Atomuffler's radical, full-flow design uses interposing sound waves, multiple-stage velocity deceleration, an obstruction-free expansion chamber and a porous disseminator (filter element) to completely dissipate harmful air exhaust blasts. A large peripheral exhaust surface area diffuses the air blast, further lowering velocity and reducing air noise. The Atomuffler is ideal for reducing Exponentially Perceived Noise (EPNdB).



CONTENTS

Atomuffler® Series

| | Model Types | Page |
|-----------------------------|-------------|------|
| Air Exhaust Muffler | M, N, & B | 3 |
| Relief Valve Muffler | X & R | 4 |
| Air Dryer Muffler | X & R | 5 |
| Vacuum Pump Exhaust Muffler | V | 6 |
| Filter Silencer | F | 7 |
| Thru-Flow Muffler | T | 8 |
| High Pressure Muffler | P | 9 |
| Defogger Muffler | L | 10 |
| Steam Exhaust Muffler | S & Z | 11 |
| Damper Muffler | D | 12 |
| Special Applications | | 13 |

Bantam™ Series

| | | |
|---------------------|---|----|
| Bantam Muffler | B | 14 |
| End Flow Muffler | D | 15 |
| Air Ejector Muffler | A | 16 |

Porous Metal Series

| | | |
|-----------------------------------|---|----|
| Porous Adjust-A-Flow Muffler | C | 17 |
| Porous Metal Filter-Muffler | P | 18 |
| Porous Metal Breather-Vent-Filter | F | 19 |

Specials

| | | |
|-------------------------|---|----|
| Micro Miniature Muffler | M | 20 |
| M64 Mini-Muff Muffler | | 20 |

Noise Information

21

Distribution

Allied Witan Company products are sold through a wide network of original equipment manufacturers and distributors. Please contact your local representative for product details and purchasing, or contact us for a representative near you.

If you and/or our distributor are unable to find a solution for your pneumatic equipment requirements in this catalog, please contact us directly. We will work with you to meet your specific needs.

All units engineered and manufactured by Allied Witan Company are constructed of corrosion-resistant materials for long life and maintenance-free performance.

The Atomuffler product line has available replacement filter elements (also referred to as disseminators), as noted in the appropriate information charts. Other replacement parts are also available as needed.

All connection sizes and dimensions are given in inches.

All item weights (without packaging weight) are given in pounds.

All flow rates are given in Standard Cubic Feet per Minute (SCFM) and measured at 90 PSI at approximately 70°F.


Items are available from the following thread types:

| | |
|------------|---|
| Male NPT | National Pipe Thread Tapered |
| Male BSPT | British Standard Pipe Thread Tapered (ISO 7-2:2000) |
| Female NPS | National Pipe Thread Straight |

Mounting Instructions

All units are provided with a hex head, making them easy to attach to exhaust ports. Units should be mounted in a protective position, free from excess vibration.

Air Exhaust Muffler

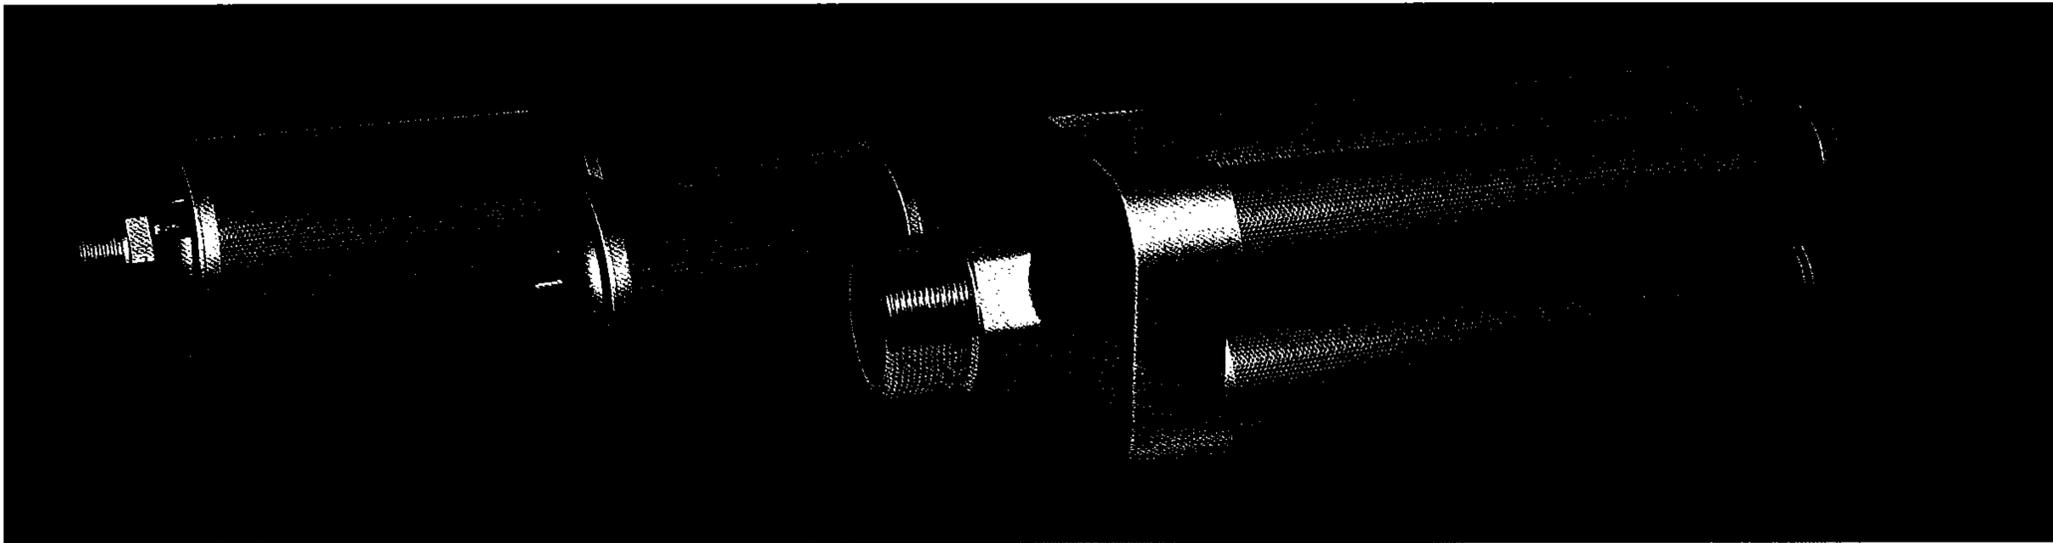


"The Original"... provides up to 85% noise reduction and 94% flow factor

Thoroughly proven on thousands of installations, the world-class Atomuffler® Air Exhaust Muffler expertly reduces Exponentially Perceived Noise (EPNdB) without impeding equipment performance. Its design takes explosive air exhaust noise discharged from valve exhaust ports and muffles it with optimized Constant Velocity (CV) flow factor. Exhaust air flows softly to atmosphere free of noise, oil fog, and contaminants – providing a clean, comfortable and productive work environment.


The Air Exhaust Muffler features a unique obstruction-free expansion chamber. Standard Air Exhaust Muffler construction includes aluminum end covers, zinc-plated steel components and a cellulose fiber element.

This design is recommended for general purpose air exhaust applications for pressures up to 125 psi.


Single Chamber-Male

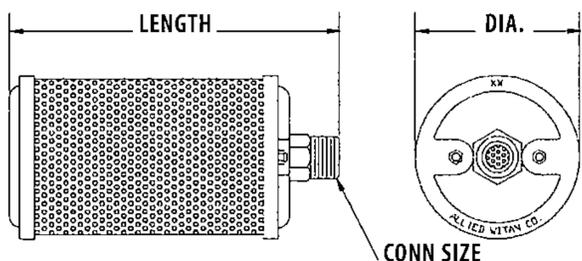

Single Chamber-Female

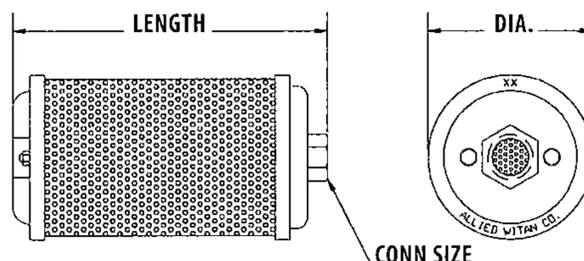

Multi-Chamber-Male

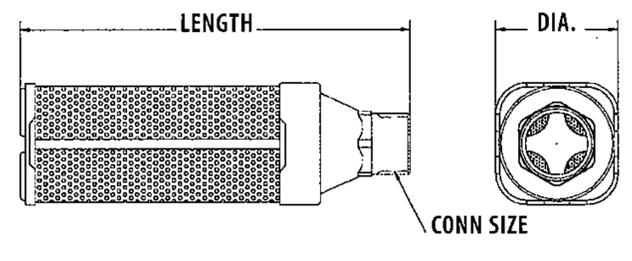

| Conn Size | Connection Thread Types | | | | | | Dimensions | | | | | |
|-----------|-------------------------|-------------|------------|-------------|------------|-------------|------------|--------|--------|-------------|-----------|---------------------|
| | Male NPT | | Female NPS | | Male BSPT | | Diameter | Length | | Item weight | Flow SCFM | Replacement Element |
| | Model Type | Item Number | Model Type | Item Number | Model Type | Item Number | | Male | Female | | | |
| 1/8 | M01 | 0111001 | N01 | 0211001 | B01 | 0121001 | 1.84 | 3.12 | 2.81 | .19 | 44 | 0911001 |
| 1/4 | M02 | 0111002 | N02 | 0211002 | B02 | 0121002 | 1.84 | 4.37 | 4.00 | .24 | 84 | 0911002 |
| 3/8 | M00 | 0111000 | N00 | 0211000 | B00 | 0121000 | 2.59 | 5.12 | 4.56 | .49 | 192 | 0911000 |
| 1/2 | M05 | 0111005 | N05 | 0211005 | B05 | 0121005 | 3.15 | 6.00 | 5.50 | .79 | 256 | 0911005 |
| 3/4 | M07 | 0111007 | N07 | 0211007 | B07 | 0121007 | 3.40 | 7.18 | 6.68 | 1.04 | 544 | 0911007 |
| 1 | M10 | 0111010 | N10 | 0211010 | B10 | 0121010 | 3.90 | 8.75 | 7.92 | 1.42 | 800 | 0911010 |
| 1-1/4 | M12 | 0111012 | N12 | 0211012 | B12 | 0121012 | 3.90 | 8.75 | 8.00 | 1.45 | 1360 | 0911012 |
| 1-1/2 | M15 | 0111015 | N15 | 0211015 | B15 | 0121015 | 5.25 | 13.56 | 12.50 | 3.27 | 2080 | 0911015 |
| 2 | M20 | 0111020 | N20 | 0211020 | B20 | 0121020 | 5.25 | 18.87 | 17.75 | 4.22 | 3200 | 0911020 |
| 3 | M30 | 0111030 | - | - | B30 | 0121030 | 7.00 | 22.93 | - | 13.43 | 7200 | 0911030 |
| 4 | M40 | 0111040 | - | - | B40 | 0121040 | 8.00 | 23.56 | - | 14.69 | 14000 | 0911040 |
| 6 | M60 | 0111060 | - | - | B60 | 0121060 | 11.00 | 30.93 | - | 29.83 | 36000 | 0911060 |

Relief Valve Muffler


Pressure equalization optimizes performance

The Atomuffler® Relief Valve Muffler includes all the outstanding features of the industry-standard Atomuffler plus an added relief valve. Superior design and construction provides a low-cost, effective method of eliminating annoying, distracting noise emitted from air-operated devices.


The unique relief valve equalizes pressure by detecting any outflow deviation, responding to the pressure differential and opening up to compensate for outflow demands.

Relief Valve Mufflers are ideal for applications where uninterrupted continuous outflow is imperative.


Single Chamber-Male

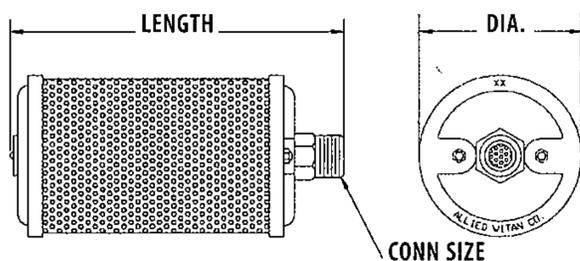

Single Chamber-Female

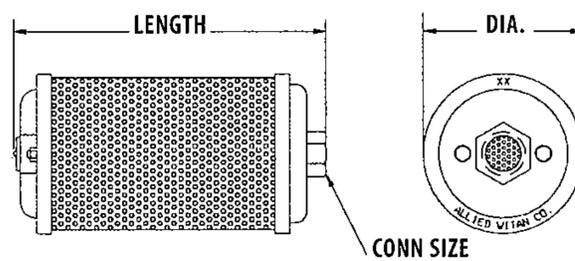


Multi-Chamber-Male

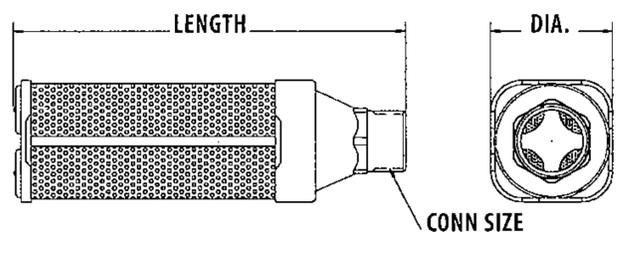

| Conn Size | Connection Thread Types | | | | | | Dimensions | | | | | |
|-----------|-------------------------|-------------|------------|-------------|------------|-------------|------------|--------|--------|-------------|-----------|---------------------|
| | Male NPT | | Female NPS | | Male BSPT | | Diameter | Length | | Item weight | Flow SCFM | Replacement Element |
| | Model Type | Item Number | Model Type | Item Number | Model Type | Item Number | | Male | Female | | | |
| 1/8 | X01 | 0312001 | R01 | 0412001 | X01 | 0322001 | 1.84 | 3.12 | 2.81 | .20 | 44 | 0911001 |
| 1/4 | X02 | 0312002 | R02 | 0412002 | X02 | 0322002 | 1.84 | 4.37 | 4.00 | .25 | 84 | 0911002 |
| 3/8 | X00 | 0312000 | R00 | 0412000 | X00 | 0322000 | 2.59 | 5.12 | 4.56 | .53 | 192 | 0911000 |
| 1/2 | X05 | 0312005 | R05 | 0412005 | X05 | 0322005 | 3.15 | 6.00 | 5.50 | .89 | 256 | 0911005 |
| 3/4 | X07 | 0312007 | R07 | 0412007 | X07 | 0322007 | 3.40 | 7.18 | 6.68 | 1.15 | 544 | 0911007 |
| 1 | X10 | 0312010 | R10 | 0412010 | X10 | 0322010 | 3.90 | 8.75 | 7.92 | 1.68 | 800 | 0911010 |
| 1-1/4 | X12 | 0312012 | R12 | 0412012 | X12 | 0322012 | 3.90 | 8.75 | 8.00 | 1.77 | 1360 | 0911012 |
| 1-1/2 | X15 | 0312015 | R15 | 0412015 | X15 | 0322015 | 5.25 | 13.56 | 12.50 | 3.63 | 2080 | 0911015 |
| 2 | X20 | 0312020 | R20 | 0412020 | X20 | 0322020 | 5.25 | 18.87 | 17.75 | 4.60 | 3200 | 0911020 |
| 3 | X30 | 0312030 | - | - | X30 | 0322030 | 7.00 | 22.93 | - | 14.86 | 7200 | 0911030 |
| 4 | X40 | 0312040 | - | - | X40 | 0322040 | 8.00 | 23.56 | - | 18.51 | 14000 | 0911040 |
| 6 | X60 | 0312060 | - | - | X60 | 0322060 | 11.00 | 30.93 | - | 37.24 | 36000 | 0911060 |

Air Dryer Muffler

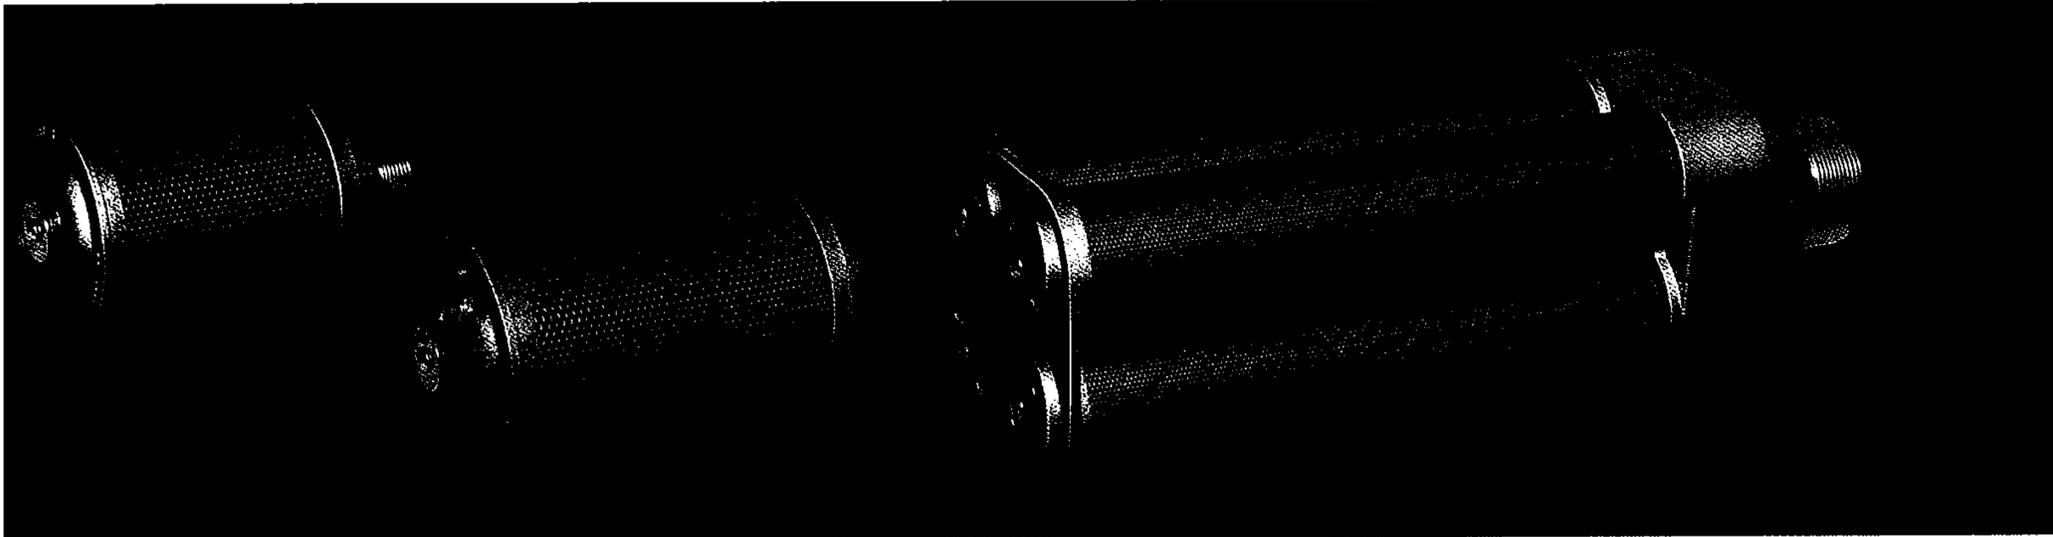


Dual-stage filter element traps particulates for longer element life and less noise

The Atomuffler® Air Dryer Muffler is designed specifically to manage the demanding service problems associated with desiccant regenerative-type air dryers. These air dryers often expel air laden with moisture which can be heavily contaminated with desiccant dust.


The primary stage of the Air Dryer Muffler's dual-stage filter element traps particulates, allowing cleaner air to permeate freely through the secondary stage, which manages the reduction of noise. This design also features a relief valve that is triggered to open if the air outflow becomes obstructed by a build-up of particulate, which will divert the outflow directly to atmosphere.

It is highly recommended that the air dryer system be initially purged of free desiccant fragments before installing a new Air Dryer Muffler or whenever an air dryer has been recharged with new desiccant material.


Single Chamber-Male

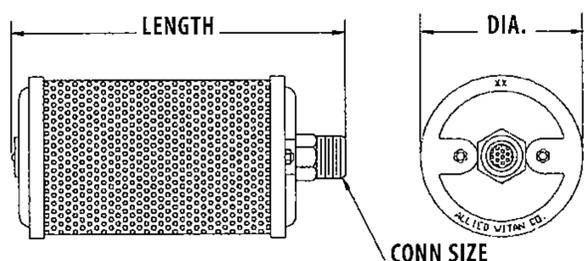

Single Chamber-Female

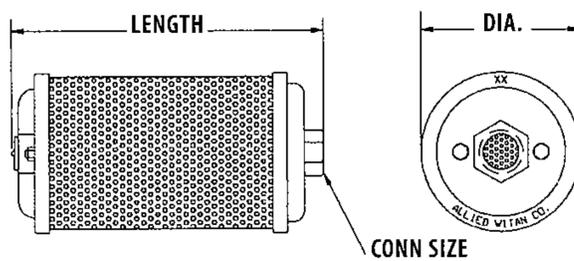


Multi-Chamber-Male

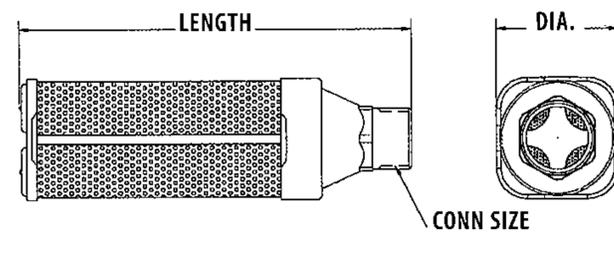

| Conn Size | Connection Thread Types | | | | | | Dimensions | | | | | |
|-----------|-------------------------|-------------|------------|-------------|------------|-------------|------------|--------|--------|-------------|-----------|---------------------|
| | Male NPT | | Female NPS | | Male BSPT | | Diameter | Length | | Item weight | Flow SCFM | Replacement Element |
| | Model Type | Item Number | Model Type | Item Number | Model Type | Item Number | | Male | Female | | | |
| 1/8 | X01 | 0375001 | R01 | 0475001 | X01 | 0325001 | 1.84 | 3.12 | 2.81 | .25 | 42 | 0941001 |
| 1/4 | X02 | 0375002 | R02 | 0475002 | X02 | 0325002 | 1.84 | 4.37 | 4.00 | .32 | 80 | 0941002 |
| 3/8 | X00 | 0375000 | R00 | 0475000 | X00 | 0325000 | 2.59 | 5.12 | 4.56 | .68 | 182 | 0941000 |
| 1/2 | X05 | 0375005 | R05 | 0475005 | X05 | 0325005 | 3.15 | 6.00 | 5.50 | 1.12 | 243 | 0941005 |
| 3/4 | X07 | 0375007 | R07 | 0475007 | X07 | 0325007 | 3.40 | 7.18 | 6.68 | 1.58 | 517 | 0941007 |
| 1 | X10 | 0375010 | R10 | 0475010 | X10 | 0325010 | 3.90 | 8.75 | 7.92 | 2.29 | 760 | 0941010 |
| 1-1/4 | X12 | 0375012 | R12 | 0475012 | X12 | 0325012 | 3.90 | 8.75 | 8.00 | 3.54 | 1292 | 0941012 |
| 1-1/2 | X15 | 0375015 | R15 | 0475015 | X15 | 0325015 | 5.25 | 13.56 | 12.50 | 4.96 | 1664 | 0941015 |
| 2 | X20 | 0375020 | R20 | 0475020 | X20 | 0325020 | 5.25 | 18.87 | 17.75 | 6.61 | 3040 | 0941020 |
| 3 | X30 | 0375030 | - | - | X30 | 0325030 | 7.00 | 22.93 | - | 15.50 | 6840 | 0941030 |
| 4 | X40 | 0375040 | - | - | X40 | 0325040 | 8.00 | 23.56 | - | 19.29 | 13300 | 0941040 |
| 6 | X60 | 0375060 | - | - | X60 | 0325060 | 11.00 | 30.93 | - | 38.47 | 34200 | 0941060 |

For High Pressure Air Dryer Mufflers go to High Pressure Mufflers, page 9

Vacuum Pump Exhaust Muffler

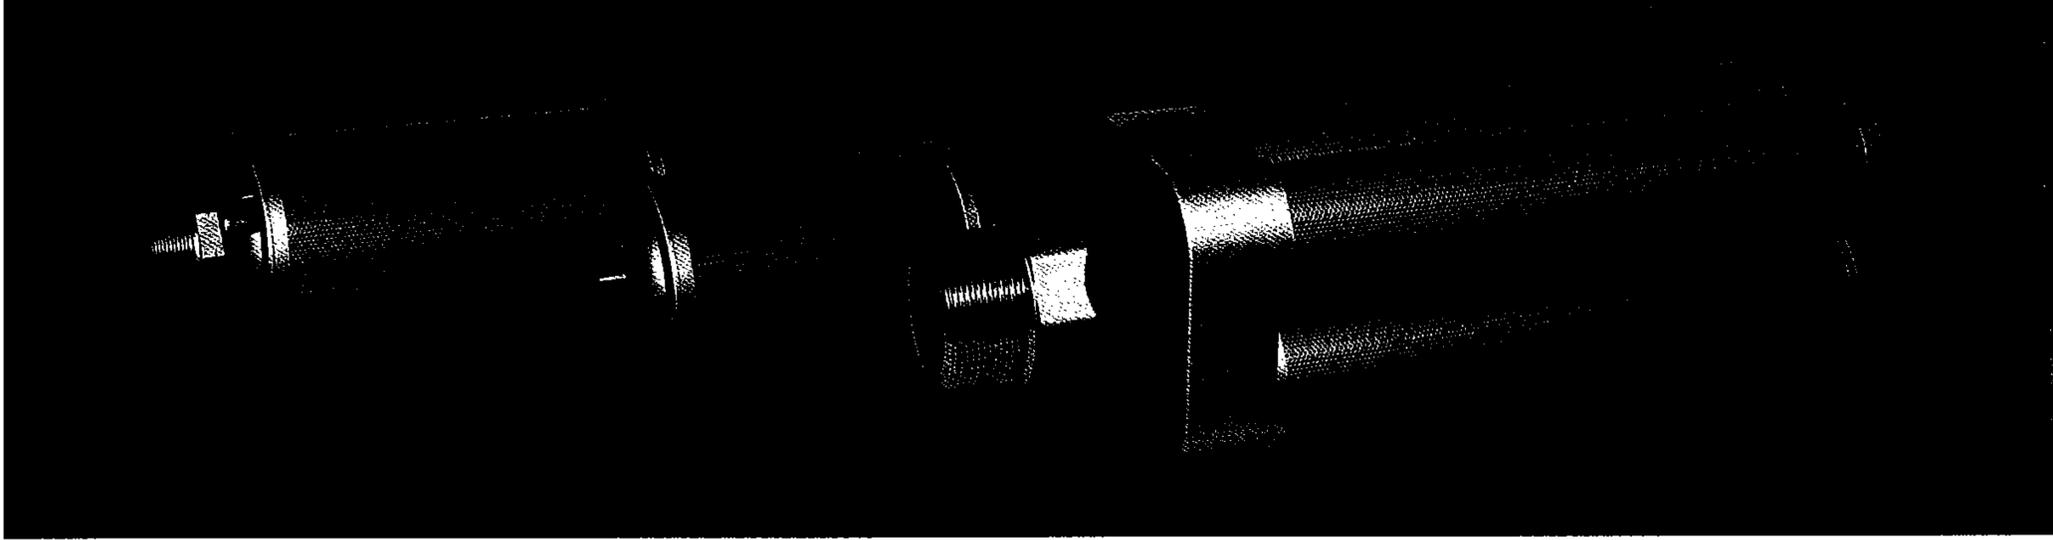


For quiet and efficient pump performance

Designed to muffle the distracting noise of vacuum pump exhausts, the Atomuffler® Vacuum Pump Exhaust Muffler is an efficient and inexpensive addition to any pump.


Noise reduction is achieved by an obstruction-free expansion chamber that reduces exhaust air velocity and softly disperses it throughout the muffler's large disseminator surface area without causing mechanical impedance.

The Vacuum Pump Exhaust Muffler is recommended for applications where quiet and efficient pump performance is critical, such as in suction apparatuses, vacuum frames, checks, simulation chambers, and transfer and control devices.


Single Chamber-Male

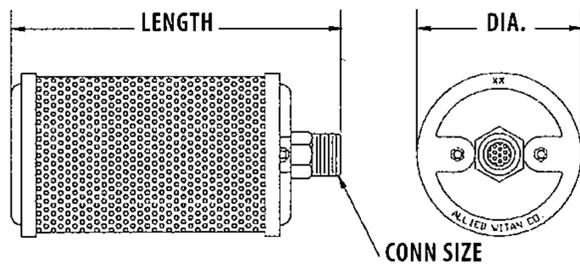

Single Chamber-Female

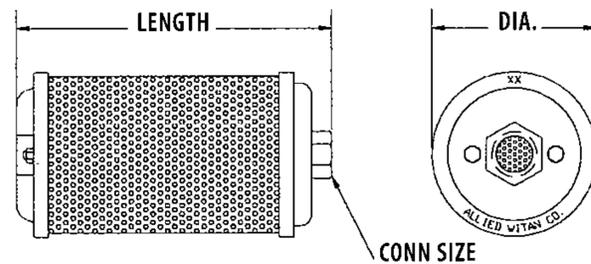


Multi-Chamber-Male

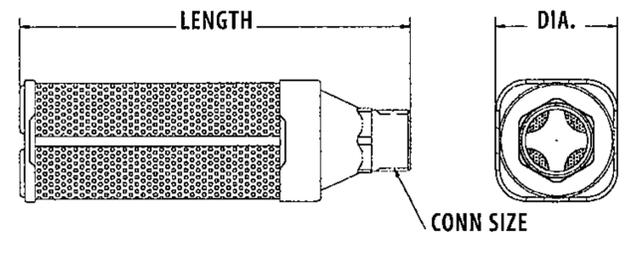

| Conn Size | Model Type | Connection Thread Types | | | Dimensions | | | | | |
|-----------|------------|-------------------------|---------------------------|--------------------------|------------|--------|-------|-------------|-----------|---------------------|
| | | Male NPT Item Number | Female NPS Item Number | Male BSPT Item Number | Diameter | Length | | Item weight | Flow SCFM | Replacement Element |
| Male | Female | | | | | | | | | |
| 1/8 | V01 | 0112001 | 0212001 | 0122001 | 1.84 | 3.12 | 2.81 | .19 | 42 | 0911001 |
| 1/4 | V02 | 0112002 | 0212002 | 0122002 | 1.84 | 4.37 | 4.00 | .23 | 80 | 0911002 |
| 3/8 | V00 | 0112000 | 0212000 | 0122000 | 2.59 | 5.12 | 4.56 | .48 | 183 | 0911000 |
| 1/2 | V05 | 0112005 | 0212005 | 0122005 | 3.15 | 6.00 | 5.50 | .80 | 244 | 0911005 |
| 3/4 | V07 | 0112007 | 0212007 | 0122007 | 3.40 | 7.18 | 6.68 | 1.06 | 517 | 0911007 |
| 1 | V10 | 0112010 | 0212010 | 0122010 | 3.90 | 8.75 | 7.92 | 1.44 | 760 | 0911010 |
| 1-1/4 | V12 | 0112012 | 0212012 | 0122012 | 3.90 | 8.75 | 8.00 | 1.49 | 1292 | 0911012 |
| 1-1/2 | V15 | 0112015 | 0212015 | 0122015 | 5.25 | 13.56 | 12.50 | 3.32 | 1976 | 0911015 |
| 2 | V20 | 0112020 | 0212020 | 0122020 | 5.25 | 18.87 | 17.75 | 4.29 | 3040 | 0911020 |
| 3 | V30 | 0112030 | - | 0122030 | 7.00 | 22.93 | - | 13.43 | 6840 | 0911030 |
| 4 | V40 | 0112040 | - | 0122040 | 8.00 | 23.56 | - | 14.69 | 13300 | 0911040 |
| 6 | V60 | 0112060 | - | 0122060 | 11.00 | 30.93 | - | 29.83 | 34200 | 0911060 |

Filter Silencer

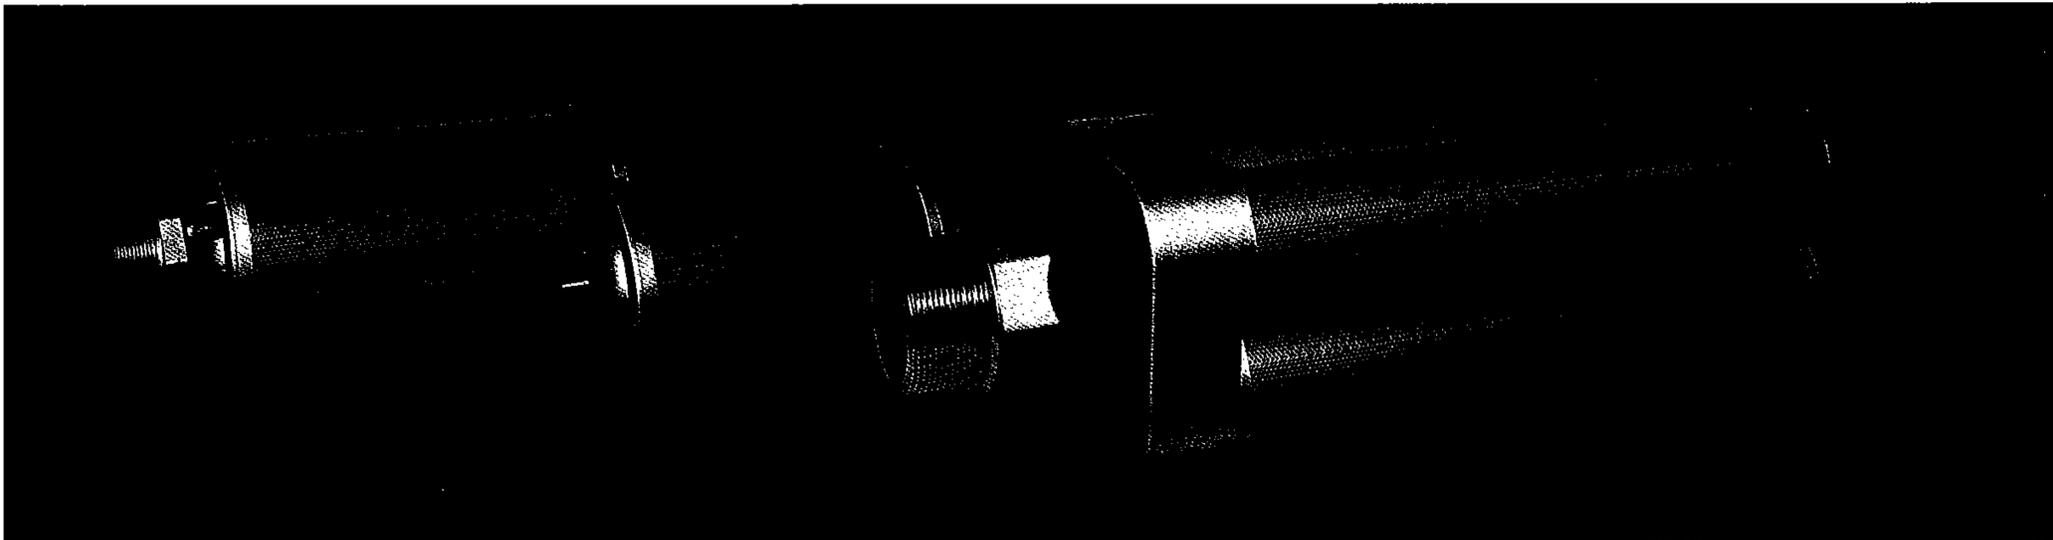


Filters out dirt particles as small as 5 micron

The Atomuffler® Filter Silencer is a highly efficient filter and an effective muffler that performs equally well at high and low velocities. Its simple design is easy to service and its durable construction lengthens service life.


Designed for heavy-duty applications and sized for high flow rates and continuous operation, the Filter Silencer is ideal for compressor intakes, pumps, reservoir vents, gear housing breathers, and wherever it is essential for air to be free of contaminants and excess noise.

As on all Atomufflers, replacement filter elements are available.


Single Chamber-Male

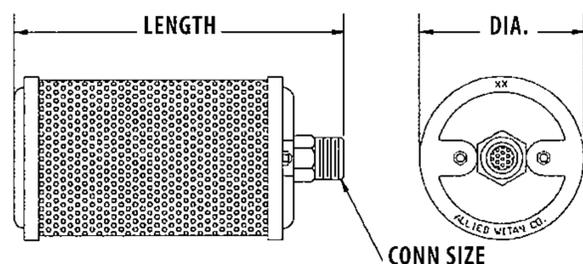

Single Chamber-Female

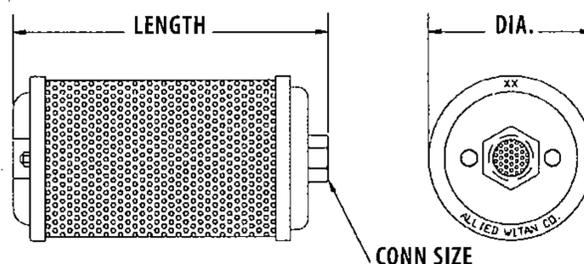


Multi-Chamber-Male

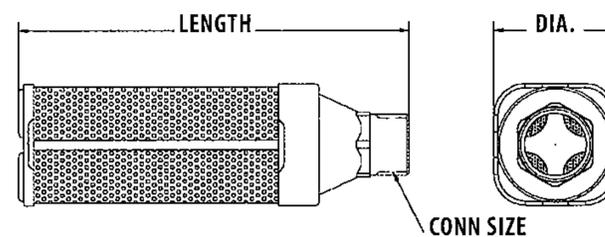

| Conn Size | Model Type | Connection Thread Types | | | Dimensions | | | Item weight | Replacement Element |
|-----------|------------|-------------------------|-------------|-------------|------------|--------|--------|-------------|---------------------|
| | | Male NPT | Female NPS | Male BSPT | Diameter | Length | | | |
| | | Item Number | Item Number | Item Number | | Male | Female | | |
| 1/8 | F01 | 0113001 | 0213001 | 0123001 | 1.84 | 3.12 | 2.81 | .22 | 0931001 |
| 1/4 | F02 | 0113002 | 0213002 | 0123002 | 1.84 | 4.37 | 4.00 | .23 | 0931002 |
| 3/8 | F00 | 0113000 | 0213000 | 0123000 | 2.59 | 5.12 | 4.56 | .48 | 0931000 |
| 1/2 | F05 | 0113005 | 0213005 | 0123005 | 3.15 | 6.00 | 5.50 | .89 | 0931005 |
| 3/4 | F07 | 0113007 | 0213007 | 0123007 | 3.40 | 7.18 | 6.68 | 1.19 | 0931007 |
| 1 | F10 | 0113010 | 0213010 | 0123010 | 3.90 | 8.75 | 7.92 | 1.63 | 0931010 |
| 1-1/4 | F12 | 0113012 | 0213012 | 0123012 | 3.90 | 8.75 | 8.00 | 1.66 | 0931012 |
| 1-1/2 | F15 | 0113015 | 0213015 | 0123015 | 5.25 | 13.56 | 12.50 | 3.87 | 0931015 |
| 2 | F20 | 0113020 | 0213020 | 0123020 | 5.25 | 18.87 | 17.75 | 5.19 | 0931020 |
| 3 | F30 | 0113030 | - | 0123030 | 7.00 | 22.93 | - | 15.15 | 0931030 |
| 4 | F40 | 0113040 | - | 0123040 | 8.00 | 23.56 | - | 16.79 | 0931040 |
| 6 | F60 | 0113060 | - | 0123060 | 11.00 | 30.93 | - | 33.43 | 0931060 |

Thru-Flow Muffler

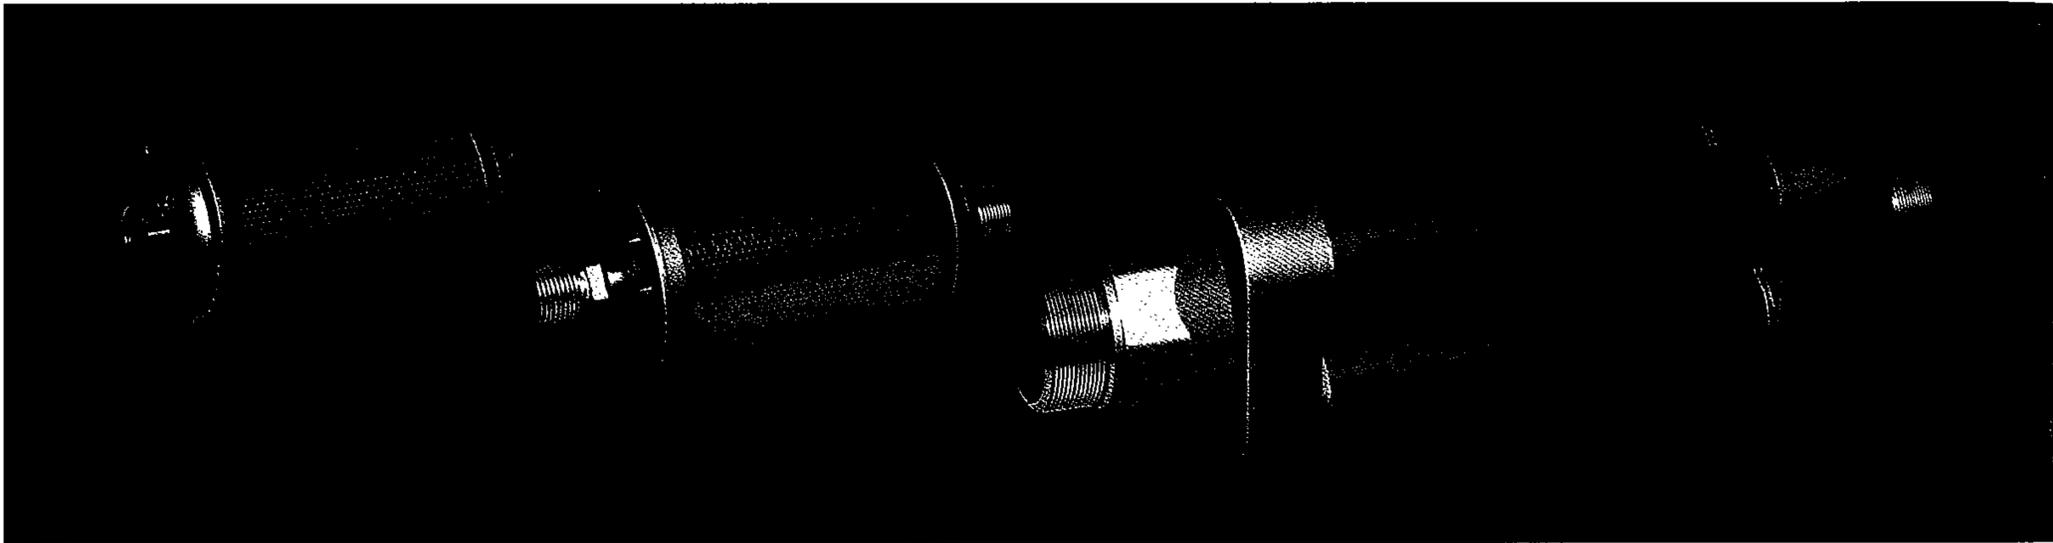


Unobstructed flow path for contaminated air

Constructed with the unique Atomuffler® expansion chamber, the Thru-Flow Muffler reduces the exhaust noise and allows contaminants to freely pass through and out the other end, to be either captured or released as desired.


The Thru-Flow Muffler is recommended for applications where compressed air is heavily contaminated with particulates. This design can be used individually, in tandem or in a series to achieve the desired results.

Note: Sizes 3", 4" and 6" are non-returnable.

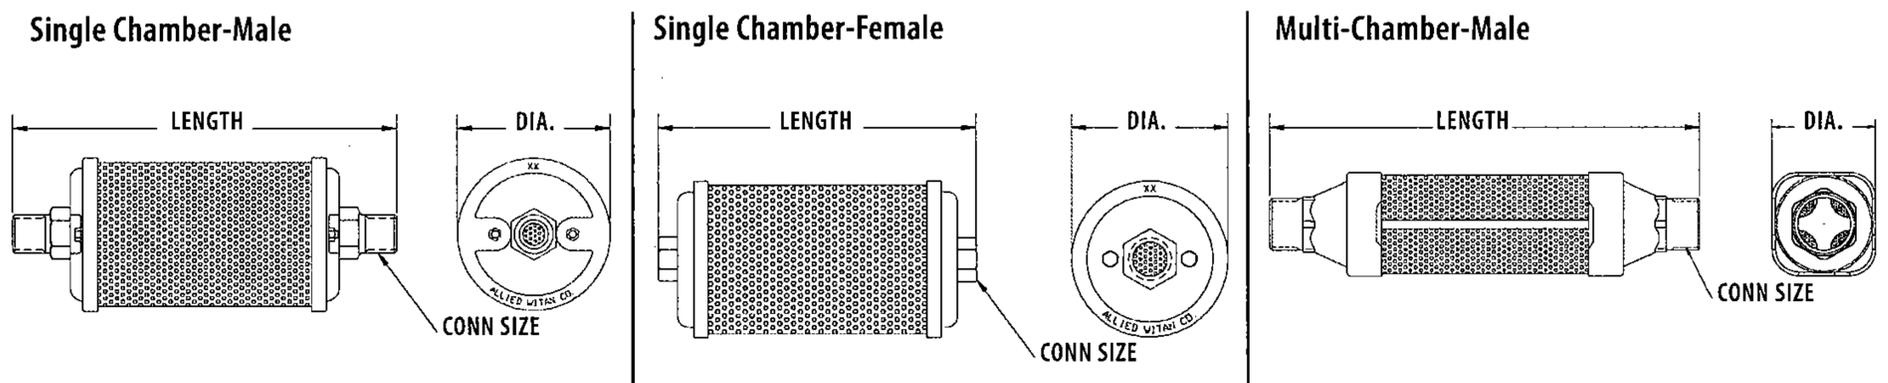

| Conn Size | Model Type | Connection Thread Types | | | Dimensions | | | | | |
|-----------|------------|-------------------------|-------------|-------------|------------|--------|--------|-------------|-----------|---------------------|
| | | Male NPT | Female NPS | Male BSPT | Diameter | Length | | Item weight | Flow SCFM | Replacement Element |
| | | Item Number | Item Number | Item Number | | Male | Female | | | |
| 1/8 | T01 | 0319001 | 0419001 | 0329001 | 1.84 | 3.87 | 2.90 | .20 | 44 | 0911001 |
| 1/4 | T02 | 0319002 | 0419002 | 0329002 | 1.84 | 5.31 | 4.15 | .26 | 84 | 0911002 |
| 3/8 | T00 | 0319000 | 0419000 | 0329000 | 2.59 | 6.00 | 4.78 | .52 | 192 | 0911000 |
| 1/2 | T05 | 0319005 | 0419005 | 0329005 | 3.15 | 7.00 | 5.78 | .85 | 256 | 0911005 |
| 3/4 | T07 | 0319007 | 0419007 | 0329007 | 3.40 | 8.25 | 6.96 | 1.12 | 544 | 0911007 |
| 1 | T10 | 0319010 | 0419010 | 0329010 | 3.90 | 10.31 | 8.34 | 1.52 | 800 | 0911010 |
| 1-1/4 | T12 | 0319012 | 0419012 | 0329012 | 3.90 | 10.37 | 8.46 | 1.62 | 1360 | 0911012 |
| 1-1/2 | T15 | 0319015 | 0419015 | 0329015 | 5.25 | 15.37 | 13.03 | 3.50 | 2080 | 0911015 |
| 2 | T20 | 0319020 | 0419020 | 0329020 | 5.25 | 20.75 | 18.23 | 4.48 | 3200 | 0911020 |
| 3 | T30 | 0319030 | - | 0329030 | 7.00 | 29.31 | - | 16.47 | 7200 | 0911030 |
| 4 | T40 | 0319040 | - | 0329040 | 8.00 | 30.06 | - | 18.87 | 14000 | 0911040 |
| 6 | T60 | 0319060 | - | 0329060 | 11.00 | 39.81 | - | 38.70 | 36000 | 0911060 |

High Pressure Muffler

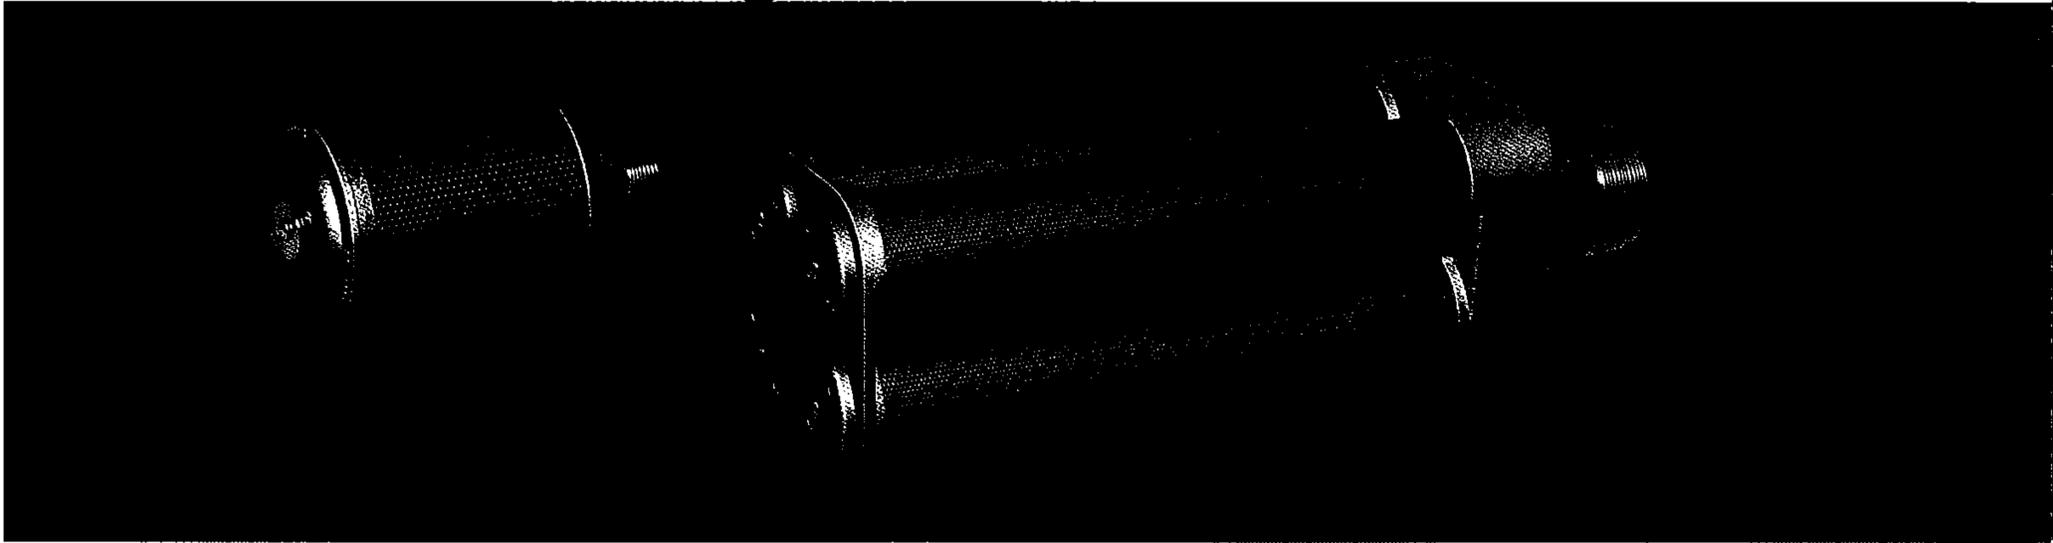


Silencing high pressure exhaust noise

The Atomuffler® High Pressure Muffler is engineered for eliminating high pressure exhaust noise. This design expands upon the features of the standard Relief Valve Muffler (see page 4) and is intended for applications in which the air exhaust exceeds 150psi (10 Bar). For special situations, features of the High Pressure Muffler can be combined with other mufflers, including the Air Dryer Mufflers and Thru-flow Mufflers.


When ordering, please specify the pipe size connection and the operating air pressure.

Note: Because High Pressure Mufflers are made-to-order to meet specific customer requirements, they are non-returnable.

Single Chamber-Male

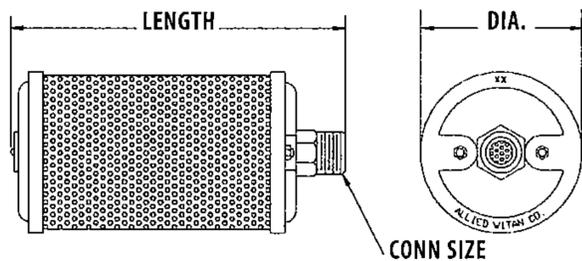

Multi-Chamber-Male

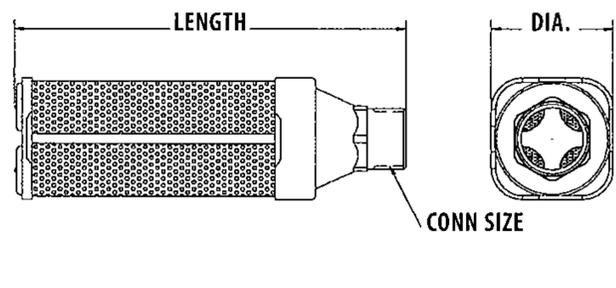

| Standard High Pressure Muffler | | | | | | Hi-Pressure Muffler for Air Dryers | | | | Dimensions | |
|--------------------------------|------------|-------------|-------------|-------------|---------------------|------------------------------------|-------------|-------------|---------------------|------------|--------|
| Conn Size | Model Type | Male NPT | Male BSPT | Item weight | Replacement Element | Male NPT | Male BSPT | Item weight | Replacement Element | Diameter | Length |
| | | Item Number | Item Number | | | Item Number | Item Number | | | | |
| 1/8 | P01 | 0316001 | 0326001 | .22 | 0911001 | 0346001 | 0347001 | .29 | 0941001 | 1.84 | 3.12 |
| 1/4 | P02 | 0316002 | 0326002 | .28 | 0911002 | 0346002 | 0347002 | .39 | 0941002 | 1.84 | 4.37 |
| 3/8 | P00 | 0316000 | 0326000 | .58 | 0911000 | 0346000 | 0347000 | .82 | 0941000 | 2.59 | 5.12 |
| 1/2 | P05 | 0316005 | 0326005 | 1.00 | 0911005 | 0346005 | 0347005 | 1.36 | 0941005 | 3.15 | 6.00 |
| 3/4 | P07 | 0316007 | 0326007 | 1.30 | 0911007 | 0346007 | 0347007 | 1.90 | 0941007 | 3.40 | 7.18 |
| 1 | P10 | 0316010 | 0326010 | 1.93 | 0911010 | 0346010 | 0347010 | 2.74 | 0941010 | 3.90 | 8.75 |
| 1-1/4 | P12 | 0316012 | 0326012 | 1.99 | 0911012 | 0346012 | 0347012 | 3.99 | 0941012 | 3.90 | 8.75 |
| 1-1/2 | P15 | 0316015 | 0326015 | 4.27 | 0911015 | 0346015 | 0347015 | 6.27 | 0941015 | 5.25 | 13.56 |
| 2 | P20 | 0316020 | 0326020 | 5.51 | 0911020 | 0346020 | 0347020 | 8.62 | 0941020 | 5.25 | 18.87 |
| 3 | P30 | 0316030 | 0326030 | 14.86 | 0911030 | 0346030 | 0347030 | 16.56 | 0941030 | 7.00 | 22.93 |
| 4 | P40 | 0316040 | 0326040 | 18.51 | 0911040 | 0346040 | 0347040 | 20.47 | 0941040 | 8.00 | 23.56 |
| 6 | P60 | 0316060 | 0326060 | 37.24 | 0911060 | 0346060 | 0347060 | 41.09 | 0941060 | 11.00 | 30.93 |


Defogger Muffler

Unique sump drains out oil mist

The Atomuffler® Defogger Muffler is specifically designed to reduce pneumatic noise emanating from air-operated devices and to effectively remove oil mist. This muffler utilizes a comprehensive approach to intercept, extract and condense oil to liquid droplets, which gravitate into a sump to be drained off periodically.


The muffler's design requires that it be mounted with the drain cock pointing downwards, which can then be opened periodically to empty out the sump.

Single Chamber-Male

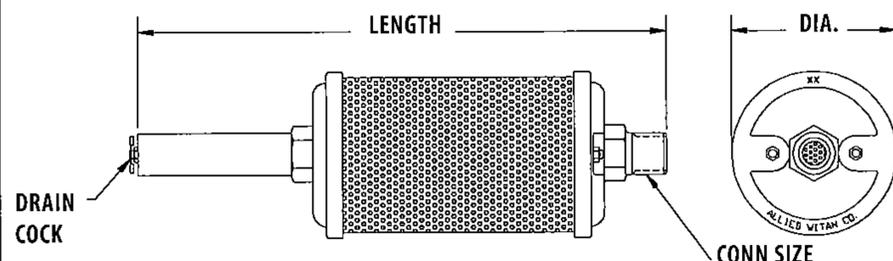

| Single Chamber-Male | | | | | | | |
|---------------------|------------|-------------|------------|--------|-------------|-----------|---------------------|
| Conn Size | Model Type | Male NPT | Dimensions | | Item weight | Flow SCFM | Replacement Element |
| | | Item Number | Diameter | Length | | | |
| 1/8 | L01 | 0313001 | 1.84 | 6.40 | .26 | 44 | 0911001 |
| 1/4 | L02 | 0313002 | 1.84 | 7.60 | .30 | 84 | 0911002 |
| 3/8 | L00 | 0313000 | 2.59 | 8.75 | .60 | 192 | 0911000 |
| 1/2 | L05 | 0313005 | 3.15 | 10.60 | 1.00 | 256 | 0911005 |
| 3/4 | L07 | 0313007 | 3.40 | 14.25 | 1.50 | 544 | 0911007 |
| 1 | L10 | 0313010 | 3.90 | 15.50 | 2.00 | 800 | 0911010 |
| 1-1/4 | L12 | 0313012 | 3.90 | 15.50 | 2.00 | 1360 | 0911012 |
| 1-1/2 | L15 | 0313015 | 5.25 | 20.40 | 5.10 | 2080 | 0911015 |
| 2 | L20 | 0313020 | 5.25 | 25.30 | 6.50 | 3200 | 0911020 |

Steam Exhaust Muffler

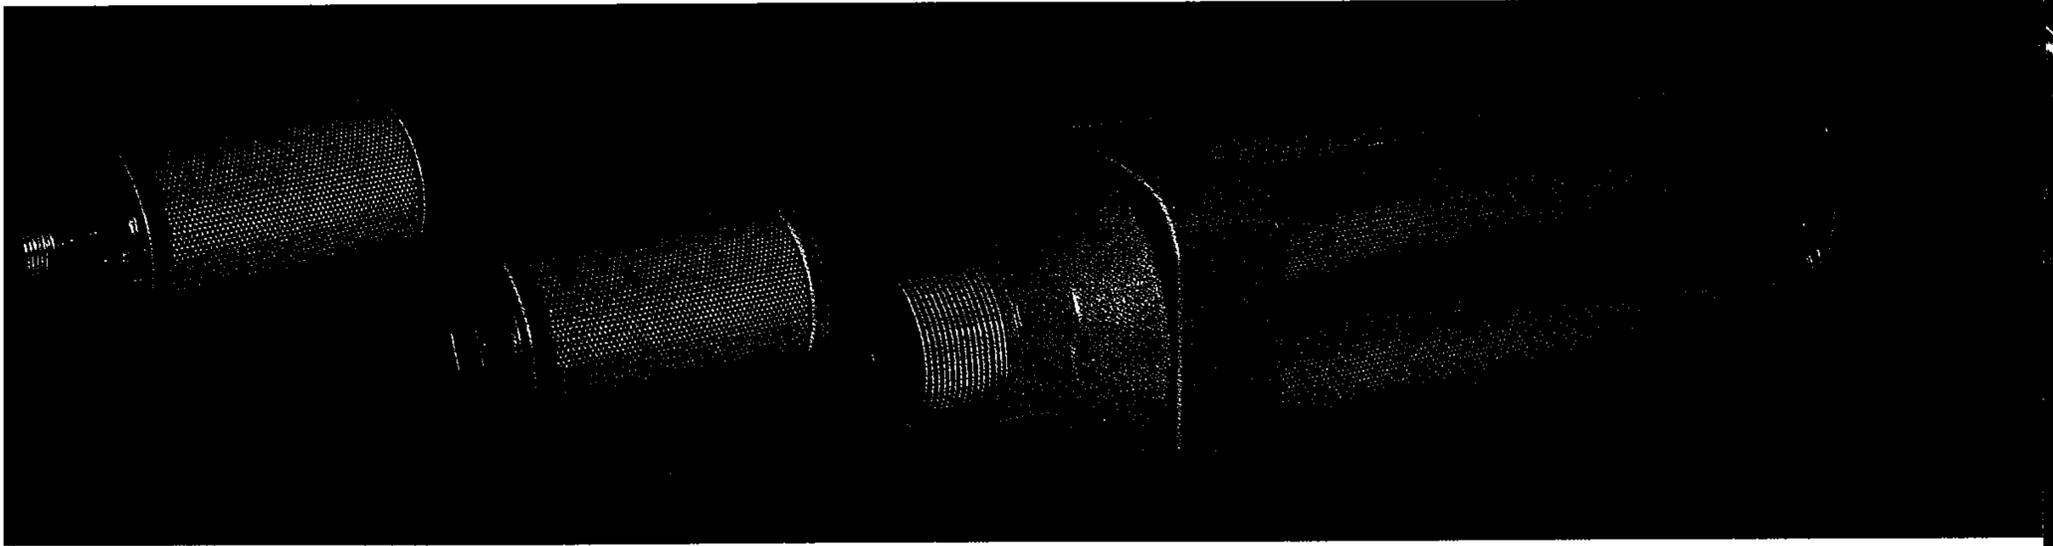

Boiler start-ups and food processing


The Atomuffler® Steam Exhaust Muffler provides a lower cost alternative and effectively silences objectionable noise created by steam exhaust outlets during boiler start-ups and testing stages only.

Using readily available replacement disseminator elements, Steam Exhaust Mufflers can be completely rebuilt and ready for the next start-up or tuning job.


Constructed of corrosion-resistant materials, the end caps are also treated with a special epoxy coating for additional resistance to conditions where alkalis are a problem. This also makes the Steam Exhaust Muffler well-suited for low-pressure food processing and similar applications.

Note: The Steam Exhaust Muffler is not designed for permanent installation on boilers.


Single Chamber-Male

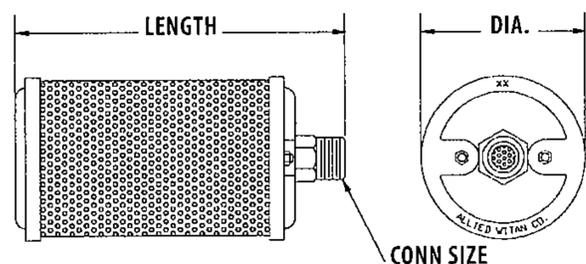

Single Chamber-Female

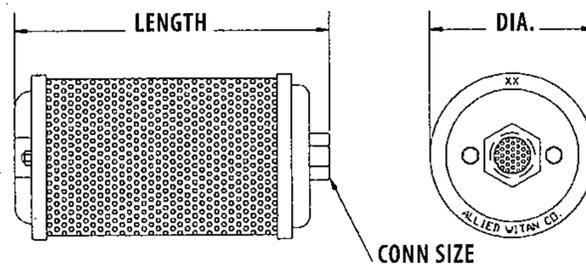

Multi-Chamber-Male

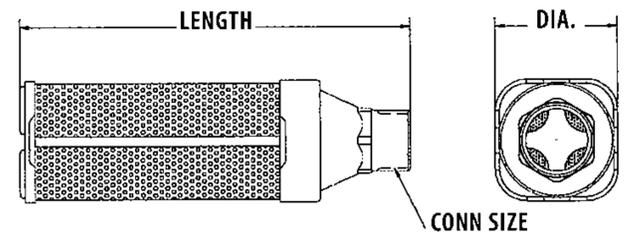

| Conn Size | Connection Thread Types | | | | | | Dimensions | | | | | |
|-----------|-------------------------|-------------|------------|-------------|------------|-------------|------------|--------|--------|-------------|-----------|---------------------|
| | Male NPT | | Female NPS | | Male BSPT | | Diameter | Length | | Item weight | Flow SCFM | Replacement Element |
| | Model Type | Item Number | Model Type | Item Number | Model Type | Item Number | | Male | Female | | | |
| 1/8 | S01 | 0114001 | Z01 | 0214001 | S01 | 0124001 | 1.84 | 3.12 | 2.81 | .22 | 36 | 0951001 |
| 1/4 | S02 | 0114002 | Z02 | 0214002 | S02 | 0124002 | 1.84 | 4.37 | 4.00 | .28 | 84 | 0951002 |
| 3/8 | S00 | 0114000 | Z00 | 0214000 | S00 | 0124000 | 2.59 | 5.12 | 4.56 | .61 | 152 | 0951000 |
| 1/2 | S05 | 0114005 | Z05 | 0214005 | S05 | 0124005 | 3.15 | 6.00 | 5.50 | .92 | 216 | 0951005 |
| 3/4 | S07 | 0114007 | Z07 | 0214007 | S07 | 0124007 | 3.40 | 7.18 | 6.68 | 1.33 | 424 | 0951007 |
| 1 | S10 | 0114010 | Z10 | 0214010 | S10 | 0124010 | 3.90 | 8.75 | 7.92 | 1.78 | 800 | 0951010 |
| 1-1/4 | S12 | 0114012 | Z12 | 0214012 | S12 | 0124012 | 3.90 | 8.75 | 8.00 | 2.99 | 1200 | 0951012 |
| 1-1/2 | S15 | 0114015 | Z15 | 0214015 | S15 | 0124015 | 5.25 | 13.56 | 12.50 | 3.96 | 1920 | 0951015 |
| 2 | S20 | 0114020 | Z20 | 0214020 | S20 | 0124020 | 5.25 | 18.87 | 17.75 | 5.32 | 2960 | 0951020 |
| 3 | S30 | 0114030 | - | - | S30 | 0124030 | 7.00 | 22.93 | - | 14.07 | 6640 | 0951030 |
| 4 | S40 | 0114040 | - | - | S40 | 0124040 | 8.00 | 23.56 | - | 15.48 | 14400 | 0951040 |
| 6 | S60 | 0114060 | - | - | S60 | 0124060 | 11.00 | 30.93 | - | 31.06 | 34400 | 0951060 |


Damper Muffler

Easily handles dirt and moisture-laden air

Featuring the same outstanding design as the industry-standard Atomuffler[®], the Damper Muffler includes an added variable reactive damper that provides an unobstructed free-flow air passage to reduce noise caused by emanating raw exhaust air.

This unique design utilizes a proven reactive principle of noise suppression. The explosive force of exhaust air impacting against the damper thrusts it into an oscillating motion, converting dynamic acoustic energy into kinetic energy. The damper's responsive pulsating motion drains off kinetic energy hence dissipating acoustical energy.

Some applications include foundry equipment and railway and transit brake systems.

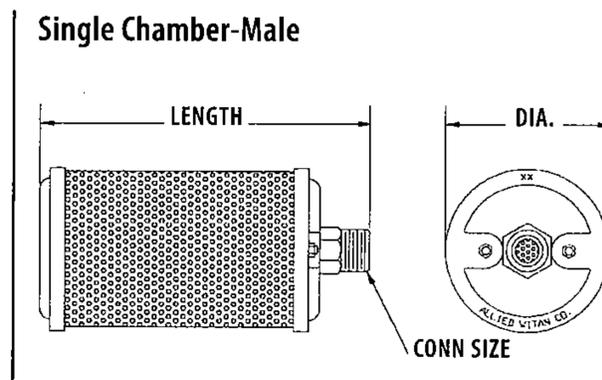

| Conn Size | Model Type | Connection Thread Types | | Dimensions | | | | |
|-----------|------------|-------------------------|--------------------------|------------|--------|-------------|-----------|---------------------|
| | | Male NPT Item Number | Male BSPT Item Number | Diameter | Length | Item weight | Flow SCFM | Replacement Element |
| 1/8 | D01 | 0374001 | 0324001 | 1.84 | 3.12 | .19 | 44 | 0911001 |
| 1/4 | D02 | 0374002 | 0324002 | 1.84 | 4.37 | .23 | 84 | 0911002 |
| 3/8 | D00 | 0374000 | 0324000 | 2.59 | 5.12 | .48 | 192 | 0911000 |
| 1/2 | D05 | 0374005 | 0324005 | 3.15 | 6.00 | .80 | 256 | 0911005 |
| 3/4 | D07 | 0374007 | 0324007 | 3.40 | 7.18 | 1.06 | 544 | 0911007 |
| 1 | D10 | 0374010 | 0324010 | 3.90 | 8.75 | 1.44 | 800 | 0911010 |
| 1-1/4 | D12 | 0374012 | 0324012 | 3.90 | 8.75 | 1.49 | 1360 | 0911012 |
| 1-1/2 | D15 | 0374015 | 0324015 | 5.25 | 13.56 | 3.30 | 2080 | 0911015 |
| 2 | D20 | 0374020 | 0324020 | 5.25 | 18.87 | 4.05 | 3200 | 0911020 |



For Special Applications

ATOMUFFLER / NPT / ANTI-ICING
Anti-Icing - Rapid Cycling Service
Male Model M01-M60
Sizes 1/8" - 6" NPT Conn.
Item No's: 0393001 - 0393060

ATOMUFFLER / NPT / SOFT FLOW
Ultra Quiet Muffling Service
Male Model K01-K20
Sizes 1/8" - 2" NPT Conn.
Item No's: 0330001 - 0330020
Also Available: Female NPS ...
Item No's: 0430001-0430020

ATOMUFFLER / NPT / SPEED CONTROL
Muffled Flow-Control Service
Male Model C01-C02
Sizes 1/8" - 1/4" NPT Conn.
Male NPT Item No's: 0315001 - 0315002
Also Available: Male BSPT ...
Item No's: 0321001 - 0321002

ATOMUFFLER / BSPT / HI-TEMP
Metalic Element Hi-Temp Service
Male Model B05-B60
Sizes 1/2" - 6" BSPT Conn.
Item No's: 0369005 - 0369060
Also Available: Male NPT ...
Item No's: 0370005-0370060

ATOMUFFLER / NPT / HEAVY DUTY
Continuous Heavy Service
Male Model M01-M60
Sizes 1/8" - 6" NPT Conn.
Item No's: 0309001 - 0309060
Also Available: Male BSPT ...
Item No's: 0320001-0320060

ATOMUFFLER / BSPT /
CORROSIVE SERVICE - LIGHT
Stainless Steel & Cellulose Fiber Element
Male Model B01-B60
Sizes 1/8" - 6" BSPT Conn.
Item No's: 0368001 - 0368060
Also Available: Male NPT ...
Item No's: 0381001-0381060


ATOMUFFLER / NPT /
CORROSIVE SERVICE - MEDIUM
Stainless Steel Components plus
SS & CF Element
Male Model M01-M60
Sizes 1/8" - 6" NPT Conn.
Item No's: 0385001 - 0385060
Also Available: Male BSPT ...
Item No's: 0395001-0395060

ATOMUFFLER / NPT /
CORROSIVE SERVICE - HEAVY
Epoxy-coat Ends plus SSC plus
SS & CF Element
Male Model M01-M60
Sizes 1/8" - 6" NPT Conn.
Item No's: 0383001 - 0383060

ATOMUFFLER / NPT /
CORROSIVE SERVICE - HEAVIER
All Stainless Steel plus SS & CF Element
Male Model M01-M20
Sizes 1/8" - 2" NPT Conn.
Item No's: 0310001 - 0310020

ATOMUFFLER / NPT /
CORROSIVE SERVICE - VERY HEAVY
Completely Stainless Steel
Male Model M05-M20
Sizes 1/2" - 2" NPT Conn.
Item No's: 0311005 - 0311020

Bantam™ Muffler

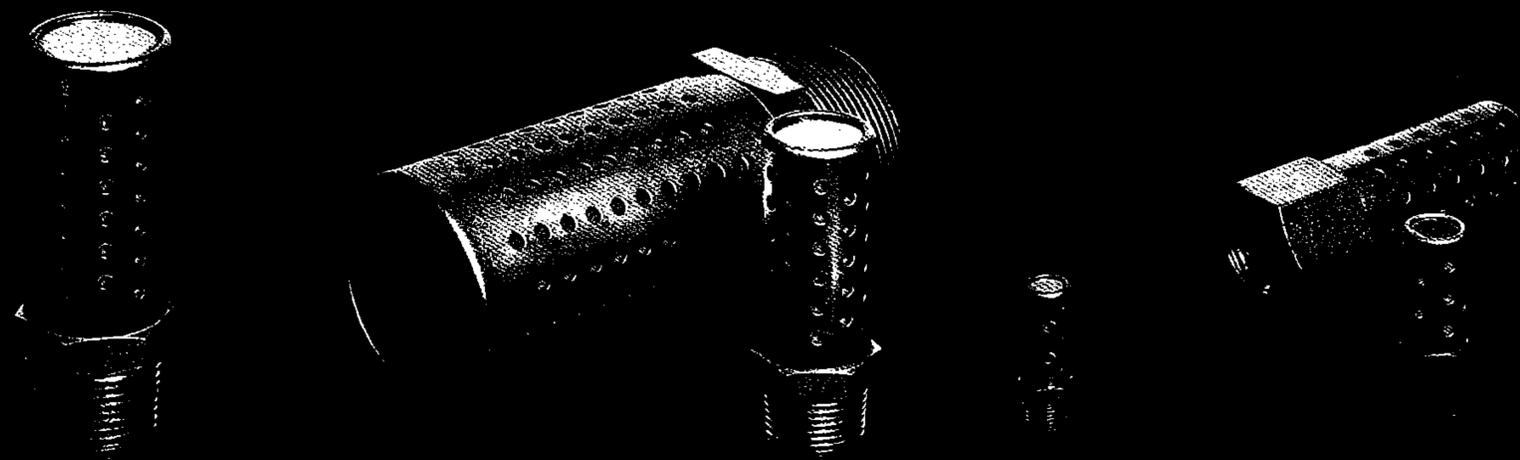


Ideal for use where space is limited

Tough and compact, the Bantam™ Muffler is durably constructed of corrosion-resistant metals to withstand shock and continuous heavy duty use under all types of conditions.

The Bantam Muffler is designed with a precise distribution of peripheral openings in a zinc-plated steel and brass acoustical element, which softly disperses exhaust air uniformly over a 360° pattern. All stainless steel construction is also available for very corrosive or sensitive situations.


Supplied with a standard pipe thread fitting, the Bantam Muffler can be attached directly to the exhaust ports of air-operated equipment.

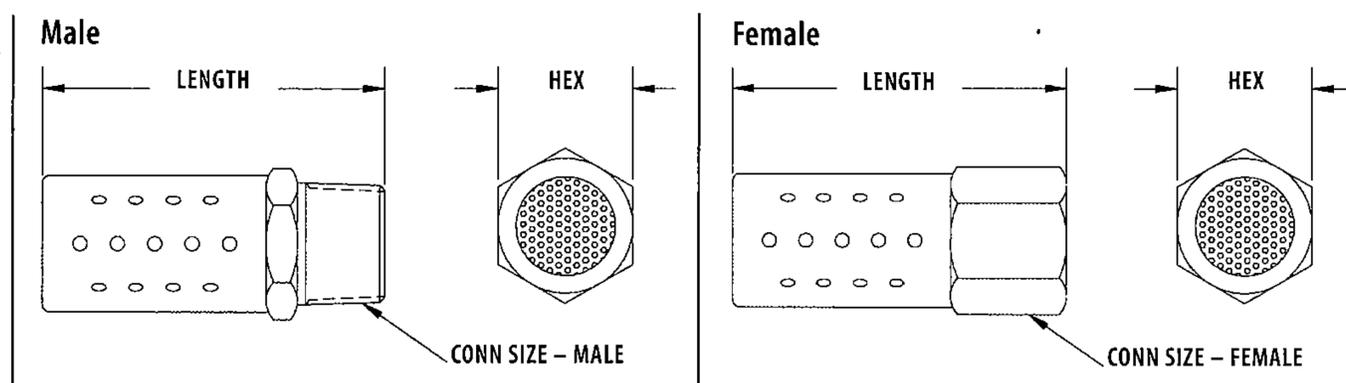

| Conn Size | Model Type | Standard Construction | | All Stainless Steel | | Item weight | Flow SCFM |
|-----------|------------|-------------------------|--------------------------|-------------------------|-----------------------------|-------------|-----------|
| | | Male NPT Item Number | Male BSPT Item Number | Male NPT Item Number | Dimensions Hex Length | | |
| 1/8 | B18 | 0154018 | 0554018 | 0503018 | .43 1.37 | .02 | 44 |
| 1/4 | B28 | 0154028 | 0554028 | 0503028 | .56 1.75 | .05 | 96 |
| 3/8 | B38 | 0154038 | 0554038 | 0503038 | .69 2.20 | .08 | 200 |
| 1/2 | B48 | 0154048 | 0554048 | 0503048 | .87 2.75 | .15 | 304 |
| 3/4 | B68 | 0154068 | 0554068 | 0503068 | 1.06 3.15 | .27 | 560 |
| 1 | B88 | 0154088 | 0554088 | 0503088 | 1.31 3.87 | .46 | 800 |
| 1-1/4 | B108 | 0154108 | 0554108 | - | 1.68 4.50 | .82 | 1120 |
| 1-1/2 | B128 | 0154128 | 0554128 | - | 2.00 5.00 | 1.04 | 1440 |
| 2 | B168 | 0154168 | 0554168 | - | 2.37 5.50 | 1.72 | 2240 |

| Conn Size | Model Type | Female - Standard Construction | | Item weight | Flow SCFM |
|-----------|------------|--------------------------------|-----------------------------|-------------|-----------|
| | | Female NPS Item Number | Dimensions Hex Length | | |
| 1/8 | B18 | 0254018 | .56 1.75 | .06 | 44 |
| 1/4 | B28 | 0254028 | .69 2.20 | .10 | 96 |
| 3/8 | B38 | 0254038 | .87 2.75 | .18 | 200 |
| 1/2 | B48 | 0254048 | 1.06 3.15 | .30 | 304 |


End Flow Muffler

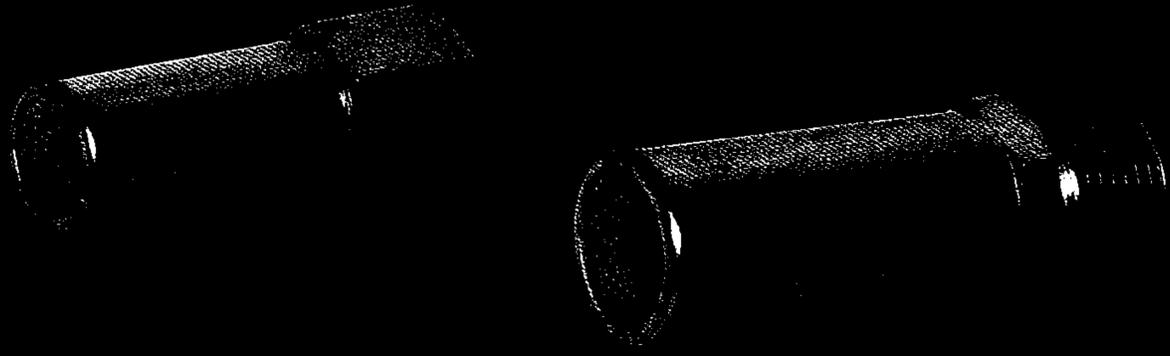

Directional flow in a compact design

The End Flow Muffler is specifically designed for use in situations where it is desirable to direct the flow of exhaust air in a single direction. Discharged axially, the exhaust air flows freely through a unique honey-combed end cap that disperses the air blast and dampens exhaust noise.

Constructed of zinc-plated steel, this model is lightweight and small for use in any location.

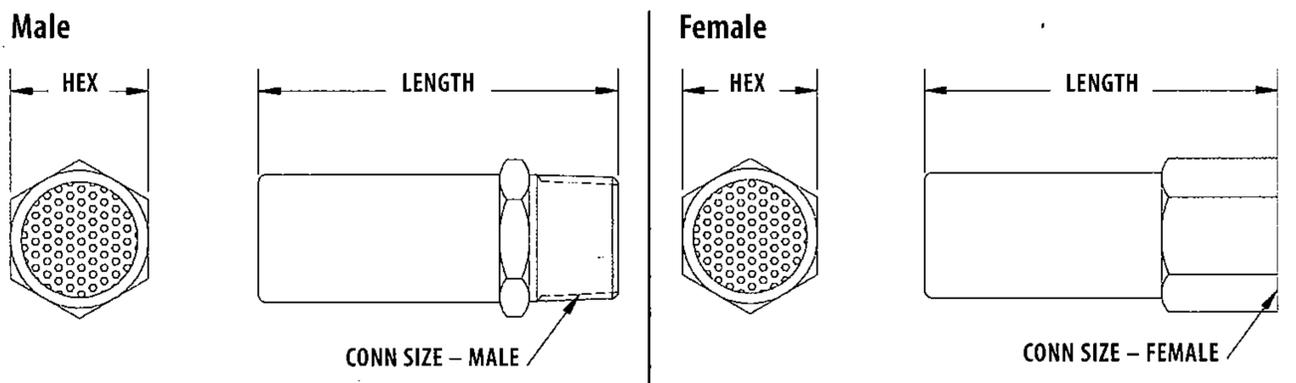

| Conn Size | Model Type | Standard Construction | | All Stainless Steel | | Dimensions | Item weight | Flow SCFM |
|-----------|------------|-------------------------|--------------------------|-------------------------|------|------------|-------------|-----------|
| | | Male NPT Item Number | Male BSPT Item Number | Male NPT Item Number | Hex | | | |
| 1/8 | D18 | 0153018 | 0551018 | 0507018 | .43 | 1.37 | .02 | 44 |
| 1/4 | D28 | 0153028 | 0551028 | 0507028 | .56 | 1.75 | .04 | 72 |
| 3/8 | D38 | 0153038 | 0551038 | 0507038 | .69 | 2.20 | .06 | 136 |
| 1/2 | D48 | 0153048 | 0551048 | 0507048 | .87 | 2.75 | .11 | 216 |
| 3/4 | D68 | 0153068 | 0551068 | 0507068 | 1.06 | 3.15 | .21 | 400 |
| 1 | D88 | 0153088 | 0551088 | 0507088 | 1.31 | 3.87 | .36 | 560 |
| 1-1/4 | D108 | 0153108 | - | - | 1.68 | 4.50 | .62 | 800 |
| 1-1/2 | D128 | 0153128 | - | - | 2.00 | 5.00 | .78 | 880 |
| 2 | D168 | 0153168 | - | - | 2.37 | 5.50 | 1.29 | 1760 |

| Conn Size | Model Type | Female - Standard Construction | | Item weight | Flow SCFM |
|-----------|------------|--------------------------------|--------------------------|-------------|-----------|
| | | Female NPS Item Number | Dimensions Hex Length | | |
| 1/8 | D18 | 0253018 | .43 1.37 | .02 | 44 |
| 1/4 | D28 | 0253028 | .56 1.75 | .04 | 72 |
| 3/8 | D38 | 0253038 | .69 2.20 | .06 | 136 |
| 1/2 | D48 | 0253048 | .87 2.75 | .14 | 216 |


Air Ejector Muffler

Featuring collimator inserts for concentrated air flow

Quickly and easily connected to any compressed air source, the Air Ejector Muffler concentrates the air stream in a narrow beam over a longer distance, delivering maximum force at the exact required point.

The Air Ejector Muffler is supplied as a complete unit with a cylindrical housing and can be directly attached to compressed air lines properly positioned for parts ejection or packaging requirements, among other uses. Ordinarily furnished with a standard plastic collimator insert, this model also can be supplied, when specified, with a special heat-resistant metal collimator insert for use in locations where extremely high ambient temperatures may be present.


Separate collimator inserts also are available as a low cost solution for applications where it is necessary to bore holes directly into a die and insert the collimator to provide exact air thrust.

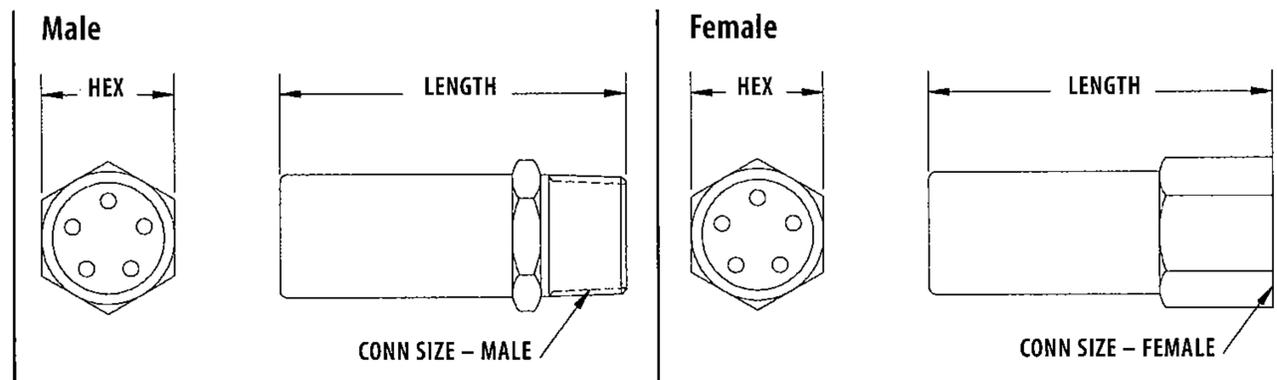

| Male-Standard Construction | | | | | | | |
|----------------------------|------------|-------------|-------------|------------|--------|-------------|-----------|
| Conn Size | Model Type | Male NPT | Male BSPT | Dimensions | | Item weight | Flow SCFM |
| | | Item Number | Item Number | Hex | Length | | |
| 1/8 | A18 | 0152018 | 0552018 | .43 | 1.37 | .02 | 22 |
| 1/4 | A28 | 0152028 | 0552028 | .56 | 1.75 | .04 | 34 |
| 3/8 | A38 | 0152038 | 0552038 | .69 | 2.20 | .06 | 45 |
| 1/2 | A48 | 0152048 | 0552048 | .87 | 2.75 | .11 | 68 |
| 3/4 | A68 | 0152068 | 0552068 | 1.06 | 3.15 | .21 | 75 |
| 1 | A88 | 0152088 | 0552088 | 1.31 | 3.87 | .36 | 101 |

| Female-Standard Construction | | | | | | |
|------------------------------|------------|-------------|------------|--------|-------------|-----------|
| Conn Size | Model Type | Female NPS | Dimensions | | Item weight | Flow SCFM |
| | | Item Number | Hex | Length | | |
| 1/8 | A18 | 0252018 | .43 | 1.37 | .02 | 22 |
| 1/4 | A28 | 0252028 | .56 | 1.75 | .04 | 34 |
| 3/8 | A38 | 0252038 | .69 | 2.20 | .06 | 45 |
| 1/2 | A48 | 0252048 | .87 | 2.75 | .14 | 68 |

Porous Adjust-A-Flow Muffler

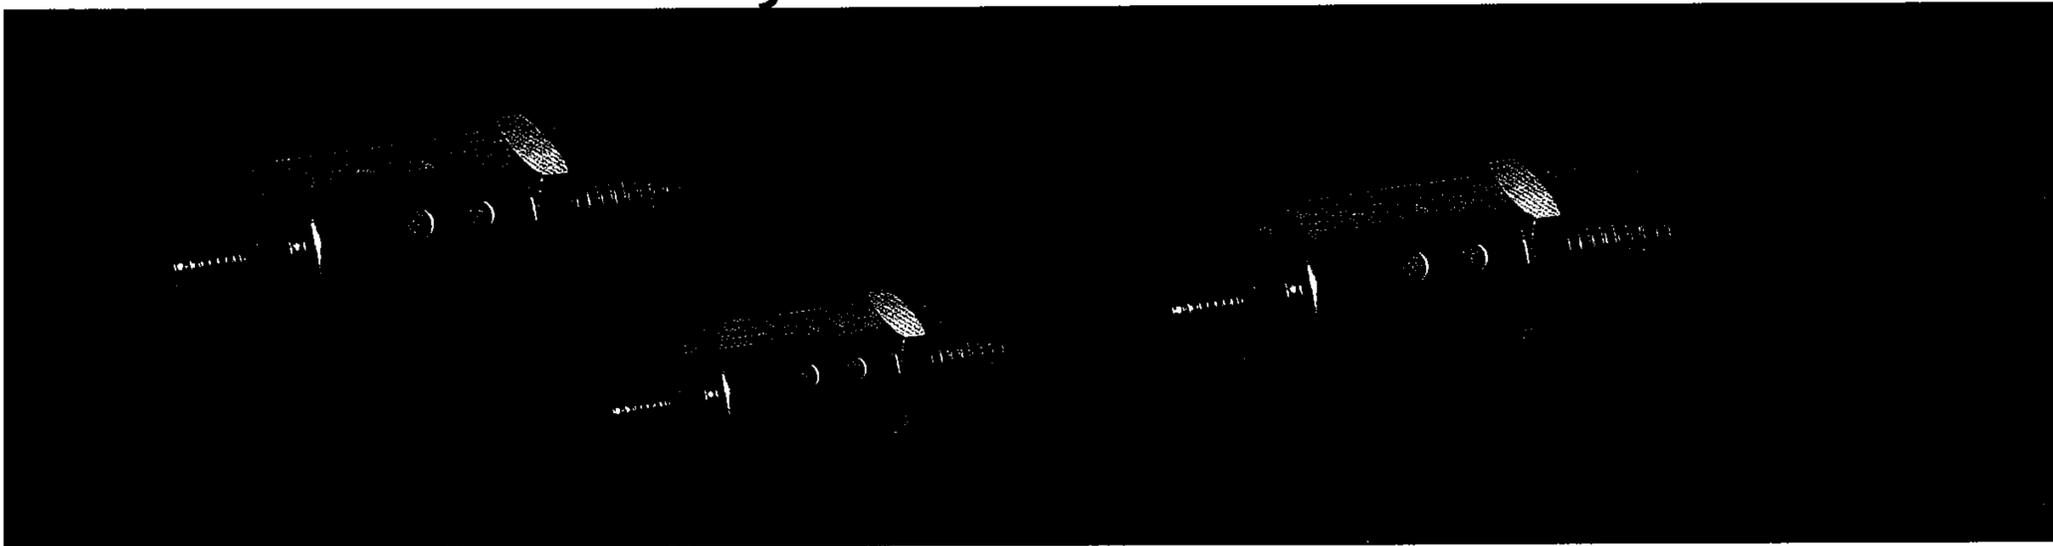


Adjustable valve controls airflow and vacuum relief

Allied Witan Company's Adjust-A-Flow Muffler is used to effectively eliminate noise and control the flow of pressurized air.

This design includes an adjustable tapered metering valve that provides needle-point control of air flow on pressure applications as well as for vacuum relief on vacuum systems. Using an external adjustment screw, air flow is precisely metered between fully closed and fully open. A locknut allows the desired setting to be locked in to prevent accidental changes.

Constructed with a sintered bronze sleeve housed in a plated steel jacket, the Adjust-A-Flow Muffler offers superior noise reduction and maximum durability.

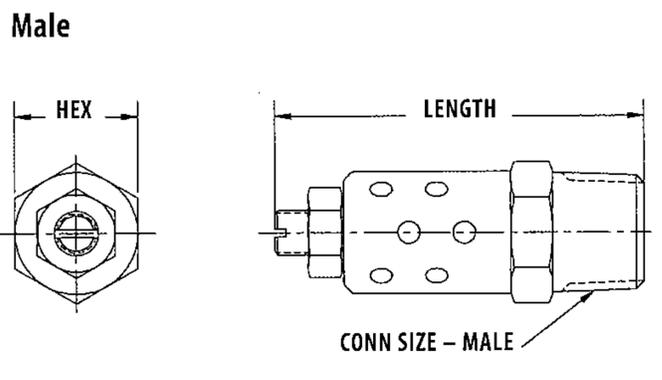

| Male 40 Micron Porous Bronze Element with Steel Casing | | | | | | | |
|--|------------|-------------|-------------|------------|--------|-------------|-----------|
| Conn Size | Model Type | NPT | BSPT | Dimensions | | Item weight | Flow SCFM |
| | | Item Number | Item Number | Hex | Length | | |
| 10-32 | C08 | 0156008* | - | .37 | 1.08 | .01 | 8 |
| 1/8 | C18 | 0156018 | 0559018 | .43 | 1.34 | .04 | 30 |
| 1/4 | C28 | 0156028 | 0559028 | .56 | 1.65 | .07 | 51 |
| 3/8 | C38 | 0156038 | 0559038 | .69 | 2.08 | .14 | 70 |
| 1/2 | C48 | 0156048 | 0559048 | .87 | 2.51 | .25 | 100 |
| 3/4 | C68 | 0156068 | 0559068 | 1.06 | 2.81 | .42 | 130 |
| 1 | C88 | 0156088 | 0559088 | 1.31 | 3.41 | .66 | 160 |

* This item does not have a steel casing.


Porous Metal Filter-Muffler

Economical choice for many filtering and muffling scenarios

The Porous Metal Filter-Muffler reduces exhaust noise and is designed for selective permeability with optimum filtering and diffusion for air and other gases and liquids.

A tough cellular porous metal filter is secured to a steel ferrule, providing a desirable combination of strength and performance.

This model is effective for many purposes, including: muffling air valve noise; exhaust and intake filtering; cryogenic phase separation; coalescing of oil mist and water vapor; and pressure or vacuum equalization. It's also compact, inexpensive and easy to install and maintain. The Porous Metal Filter-Muffler is particularly suitable for use where space is limited.

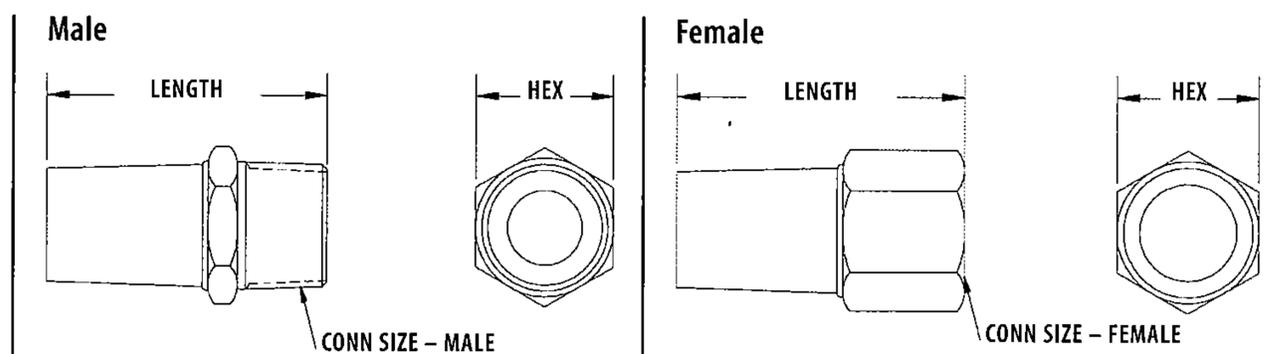

For Special Applications

Male Model P08 - P168
Sizes 10-32, 1/8" - 2" NPT Conn.

- **FILT-MUFF / NPT / 10 µm**
10 Micron Porous Bronze Element
Item No's: 0525008 - 0525168
- **FILT-MUFF / NPT / 20 µm**
20 Micron Porous Bronze Element
Item No's: 0526008 - 0526168
- **FILT-MUFF / NPT / 90 µm**
90 Micron Porous Bronze Element
Item No's: 0570018 - 0570168

FILT-MUFF / NPT / BRASS FITTING

40 Micron Porous Bronze Element
Male Model P08 - P48
Sizes 10-32, 1/8" - 1/2" NPT Conn.
Item No's: 0555008 - 0555048

FILT-MUFF / NPT / ALL STAINLESS STEEL

50 Micron Porous SS Element
Male Model P18 - P88
Sizes 1/8" - 1" NPT Conn.
Item No's: 0579018 - 0579088

Male 40 Micron - Porous Bronze Element

| Conn Size | Model Type | NPT | BSPT | Dimensions | | Item weight | Flow SCFM |
|-----------|------------|-------------|-------------|------------|--------|-------------|-----------|
| | | Item Number | Item Number | Hex | Length | | |
| 10-32 | P08 | 0155008* | - | .37 | .79 | .01 | 12 |
| 1/16 | P16 | 0155016 | - | .37 | .79 | .01 | 24 |
| 1/8 | P18 | 0155018 | 0556018 | .43 | .89 | .02 | 48 |
| 1/4 | P28 | 0155028 | 0556028 | .56 | 1.28 | .04 | 64 |
| 3/8 | P38 | 0155038 | 0556038 | .69 | 1.52 | .06 | 160 |
| 1/2 | P48 | 0155048 | 0556048 | .87 | 1.98 | .11 | 240 |
| 3/4 | P68 | 0155068 | 0556068 | 1.06 | 2.28 | .16 | 400 |
| 1 | P88 | 0155088 | 0556088 | 1.31 | 2.96 | .31 | 560 |
| 1-1/4 | P108 | 0155108+ | 0556108+ | 1.68 | 3.36 | .55 | 640 |
| 1-1/2 | P128 | 0155128+ | 0556128+ | 2.00 | 4.00 | .81 | 1200 |
| 2 | P168 | 0155168+ | 0556168+ | 2.37 | 4.70 | 1.33 | 2000 |


Also Available: 10, 20, and 90 Micron in BSPT thread * This size with Brass Fitting + These sizes are 90 Micron

Female 40 Micron - Porous Bronze Element

| Conn Size | Model Type | NPS | Dimensions | | Item weight | Flow SCFM |
|-----------|------------|-------------|------------|--------|-------------|-----------|
| | | Item Number | Hex | Length | | |
| 1/8 | P18 | 0255018 | .56 | 1.25 | .04 | 48 |
| 1/4 | P28 | 0255028 | .69 | 1.45 | .07 | 64 |
| 3/8 | P38 | 0255038 | .87 | 1.89 | .13 | 160 |
| 1/2 | P48 | 0255048 | 1.06 | 2.12 | .20 | 240 |

Also Available: 10, 20, and 90 Micron in NPS thread

Porous Metal Breather-Vent-Filters

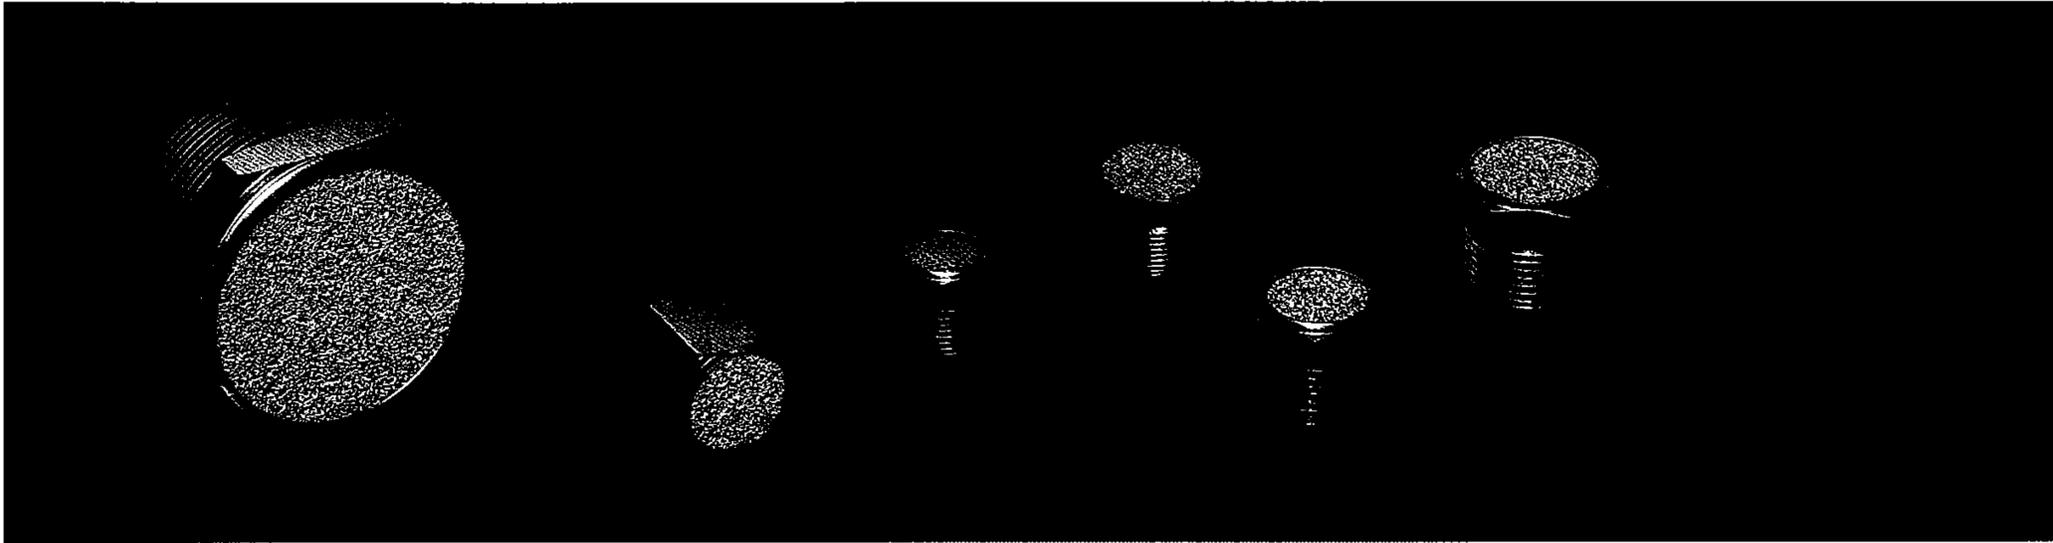


Tough, inexpensive and low-profile

Using the standard male pipe thread version, Allied Witan Company's Breather-Vent-Filter can be inserted with little protrusion as a flat, integral part of equipment. This model is a suitable alternative to spaces that are too small to accommodate the standard Porous Metal Filter-Muffler (see page 18).

With its very low profile, the Metal Breather-Vent-Filter is a compact unit most often used as a breather vent filter for cylinders, gear boxes, crank cases, storage cases, storage tanks, and other vessels – wherever pressure equalization is required.

In addition to the standard model, an innovative modification is available using a highly porous screen media to allow for unrestricted flow while limiting infiltration of unwanted objects.

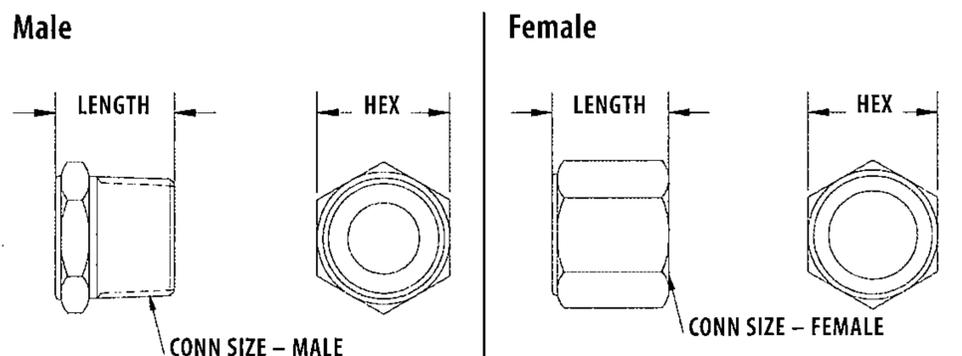

| Male 90 Micron - Porous Bronze Disc | | | | | | | |
|-------------------------------------|------------|-------------|-------------|------------|--------|-------------|-----------|
| Conn Size | Model Type | NPT | BSPT | Dimensions | | Item weight | Flow SCFM |
| | | Item Number | Item Number | Hex | Length | | |
| 10-32 | F08 | 0157008* | - | .37 | .37 | .01 | 6 |
| 1/16 | F16 | 0157016+ | - | .37 | .37 | .01 | 12 |
| 1/8 | F18 | 0157018 | 0558018 | .43 | .40 | .01 | 24 |
| 1/4 | F28 | 0157028 | 0558028 | .56 | .68 | .02 | 32 |
| 3/8 | F38 | 0157038 | 0558038 | .69 | .79 | .04 | 80 |
| 1/2 | F48 | 0157048 | 0558048 | .87 | .97 | .07 | 120 |
| 3/4 | F68 | 0157068 | 0558068 | 1.06 | 1.06 | .10 | 200 |
| 1 | F88 | 0157088 | 0558088 | 1.31 | 1.34 | .19 | 280 |
| 1-1/4 | F108 | 0157108 | 0558108 | 1.68 | 1.40 | .33 | 320 |
| 1-1/2 | F128 | 0157128 | 0558128 | 2.00 | 1.47 | .45 | 600 |
| 2 | F168 | 0157168 | 0558168 | 2.37 | 1.60 | .72 | 1000 |

Also Available: 10 and 20 Micron in BSPT thread * This item is 40 Micron with Brass Fitting + This item is 40 Micron

| Female 90 Micron - Porous Bronze Disc | | | | | | |
|---------------------------------------|------------|-------------|------------|--------|-------------|-----------|
| Conn Size | Model Type | NPS | Dimensions | | Item weight | Flow SCFM |
| | | Item Number | Hex | Length | | |
| 1/8 | F18 | 0257018 | .56 | .64 | .03 | 24 |
| 1/4 | F28 | 0257028 | .69 | .76 | .05 | 32 |
| 3/8 | F38 | 0257038 | .87 | .94 | .09 | 80 |
| 1/2 | F48 | 0257048 | 1.06 | .99 | .14 | 120 |

Also Available: 10 and 20 Micron in NPS thread

For Special Applications

- Male Model F18 - F168
Sizes 1/8" - 2" NPT Conn.
- B-V-F / NPT / 10 µm
10 Micron Porous Bronze Disc
Item No's: 0527018 - 0527168
- B-V-F / NPT / 20 µm
20 Micron Porous Bronze Disc
Item No's: 0528018 - 0528168



B-V-F / NPT / BRASS FITTING
90 Micron Porous Bronze Disc
Male Model F08 - F48
Sizes 10-32, 1/8" - 1/2" NPT Conn.
Item No's: 0557008 - 0557048

B-V-F / NPT / ALL STAINLESS STEEL
100 Micron Porous SS Disc
Male Model F18 - F88
Sizes 1/8" - 1" NPT Conn.
Item No's: 0504018 - 0504088

FILTER / NPT / SINGLE SCREEN
Strainer Very Hi-Flow Service
Male Model F18 - F88
Sizes 1/8" - 1" NPT Conn
Item No's: 0506018 - 0506088

FILTER / NPT / MULTI SCREEN
Strainer Hi-Flow Service
Male Model F18 - F168
Sizes 1/8" - 2" NPT Conn.
Item No's: 0509018 - 0509168

Micro Miniature Muffler/ M64 Mini-Muff

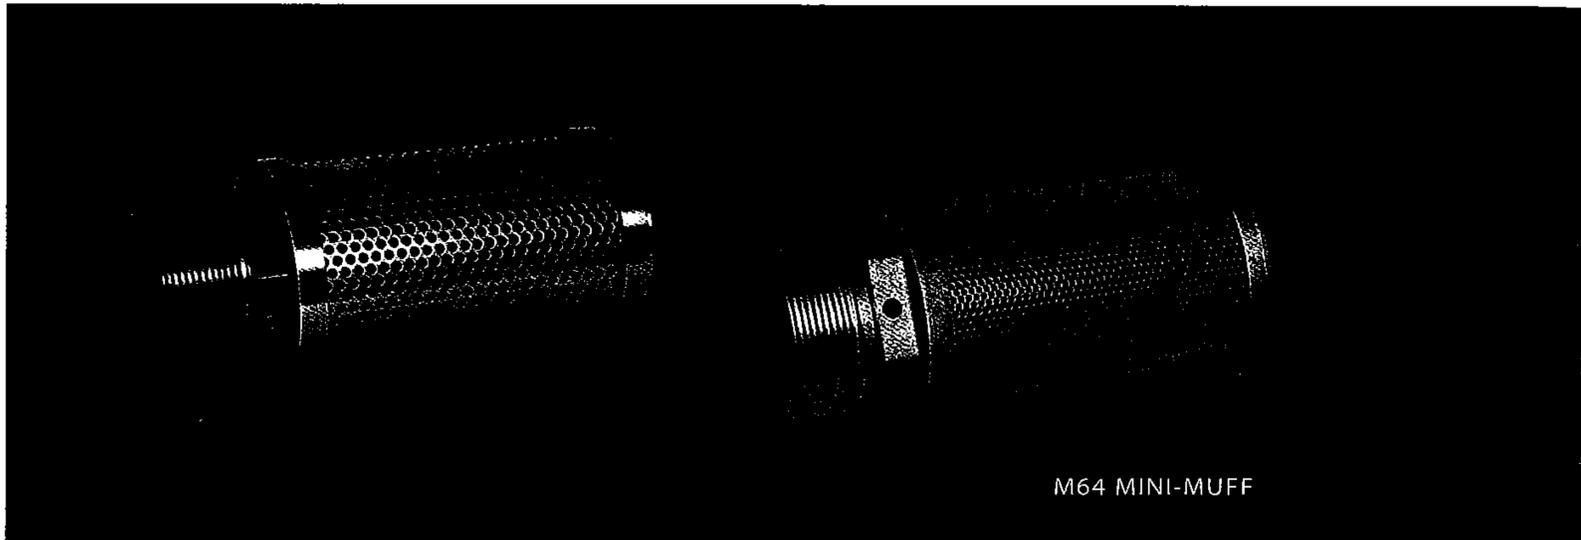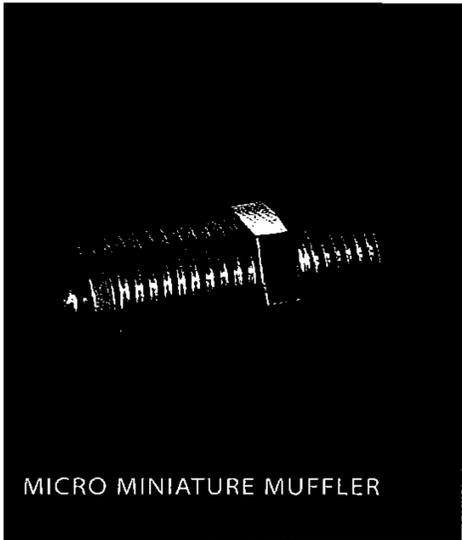

Micro Miniature Muffler


Adjustable control for logic applications

Allied Witan Company's Micro Miniature Muffler is designed specifically for low air volume use on pneumatic logic applications such as control, pilot, limit, zone, and relay valves. The muffler's compact size allows installation in extremely tight quarters.

Attached directly to exhaust ports, noise reduction is accomplished by dispersing the exhaust air radially, minimizing sound intensity with negligible flow impedance. The Micro Miniature Muffler also can be used as a speed control to meter exhaust air flow.

| Male Zinc-plated Steel Construction | | | | | | |
|-------------------------------------|------------|-------------|------------|--------|-------------|-----------|
| Conn Size | Model Type | NPT | Dimensions | | Item weight | Flow SCFM |
| | | Item Number | Hex | Length | | |
| 1/8 | M18 | 0151018 | .43 | 1.06 | .03 | 32 |
| 1/4 | M28 | 0151028 | .56 | 1.59 | .07 | 48 |

Male

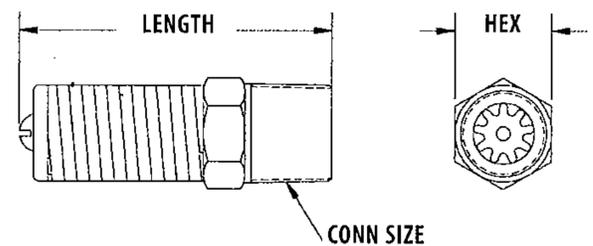

M64 Mini-Muff

High flow in a compact package


The M64 Mini-Muff combines the serviceability of our Atomuffler® products with the compact size and durability of our all-metal Bantam™ mufflers.

Constructed entirely of corrosion-resistant metals, the standard M64 Mini-Muff allows for higher temperature operating conditions. Back pressure is kept at a minimum thanks to a large unobstructed inlet and exhaust surface area. All stainless steel construction is also available for very corrosive or sensitive situations.

This model has a 2" pipe thread and is easily attached directly to the exhaust ports of air-operated equipment.

| M64 Mini-Muff | | | | | | |
|---------------|------------|-------------|------------|--------|-------------|-----------|
| Conn Size | Model Type | Item Number | Dimensions | | Item weight | Flow SCFM |
| | | | Diameter | Length | | |
| 2" BSPT | M64 | 0300021 | 3.31 | 7.71 | 1.85 | 4000 |
| 2" NPT | M64 | 0300073 | 3.31 | 7.71 | 1.85 | 4000 |

Male

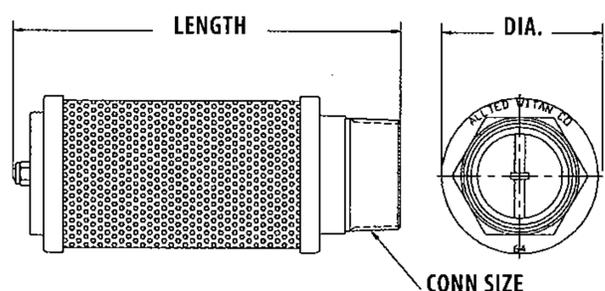



Noise Information

For more than 60 years, Allied Witan Company's Atomuffler® has been setting industry standards in sound control applications all over the world. The Atomuffler is specified in a wide range of industrial applications where efficiency, dependability and performance are critical. In addition to having superior sound silencing properties, the Atomuffler is valuable for being an air diffuser that is unsurpassed in the muffler field. Air diffusion positively prevents troublesome air flow and dangerous after-blasts.

The Atomuffler's unique system is a proven approach to sound control and easy to install and use. It is widely recommended by leading noise consultants and safety engineers throughout the world.

When you specify the Atomuffler, you can be confident you're getting the ultimate in noise reduction, advanced muffler design, exceptional service and value.

How much noise is too much?

- Noise levels in the upper 70 decibel (dB) range are annoying to some people.
- Exposure to levels above 80 dB for 8 hours can possibly cause damage, while damage is likely when exposed to levels above 90 dB for the same amount of time.
- When levels are above 100 dB for 8 hours, serious damage is possible.
- 120 dB is considered the human threshold for pain, and eardrum rupture can occur at 150 db.

Damage caused by noise goes beyond just hearing loss. Recent studies have shown that increased exposure to high levels of noise can cause stress, hypertension, and even cardiovascular problems.

Tests performed on air exhausts not equipped and equipped with the Atomuffler showed that noise levels can drop from 97-121 dB without a muffler down to 81-84 dB with the Atomuffler. That's a decrease of up to 37 dB. On average, noise levels were reduced 17-25 dB. However, every application is different and there is no way of predicting exact results.

To put everything in perspective:

- 3 dB reduction cuts sound energy in half
- 10 dB reduction decreases sound energy by a factor of 10
- 20 dB reduction decreases sound energy by a factor of 100

